

# Type 1787 Current Sense Resistor Networks


## Accurate Current Sensing in Multi-Range Instrumentation

Type 1787 Current Sense Resistor Networks utilize Caddock's Micronox® resistance films and advanced high thru-put laser manufacturing capabilities to achieve many vital advantages in precision current measurement circuits, including laboratory and bench-type digital instrumentation:

- The thin-profile single-package configuration replaces as many as four discrete current sense resistors.
- The monolithic construction and standardized lead spacing simplify installation.
- Caddock Micronox® resistance films provide exceptional stability for improved long-term measurement accuracy.

Twelve standard models in five network arrangements provide the specific accuracy and resistance values required for a wide range of current measuring instruments and circuits.

Prototype quantities of most models of the Type 1787 Current Sense Resistor Networks are available either from stock or within 6 weeks after receipt of order.

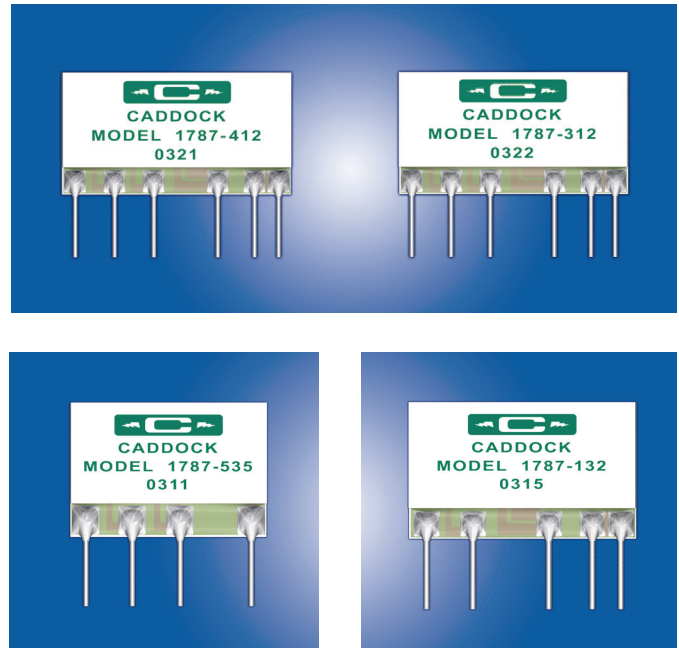

Model No.	Resistance Values				Power Rating Watts				Max. Power Rating Watts Total Pkg.	Fig.	Absolute Tolerance % <sup>①</sup>	Maximum Absolute TC ppm/°C <sup>②</sup>	Absolute Stability Max. % Change in Resistance Value	
	R <sub>A</sub>	R <sub>B</sub>	R <sub>C</sub>	R <sub>D</sub>	R <sub>A</sub>	R <sub>B</sub>	R <sub>C</sub>	R <sub>D</sub>					Load Life <sup>③</sup>	Shelf Life <sup>④</sup>
1787-31	999.9 Ω	99.9 Ω	9.9 Ω	0.9 Ω	0.25	0.25	0.50	1.0	1.0	1	0.25	80	0.05	0.03
1787-312	999.9 Ω	99.9 Ω	9.9 Ω	0.9 Ω	0.25	0.25	0.50	1.0	1.0	1	0.10	80	0.03	0.02
1787-41	1,000 Ω	100 Ω	10 Ω	1 Ω	0.25	0.25	0.50	1.0	1.0	2	0.25	80	0.05	0.03
1787-412	1,000 Ω	100 Ω	10 Ω	1 Ω	0.25	0.25	0.50	1.0	1.0	2	0.10	80	0.03	0.02
1787-5	999 Ω	99 Ω	9 Ω	N/A	0.25	0.25	0.75	N/A	0.75	3	0.25	50	0.04	0.02
1787-53	999 Ω	99 Ω	9 Ω	N/A	0.25	0.25	0.75	N/A	0.75	3	0.10	50	0.02	0.01
1787-535	999 Ω	99 Ω	9 Ω	N/A	0.25	0.25	0.75	N/A	0.75	3	0.05	50	0.02	0.01
1787-6	1,000 Ω	100 Ω	10 Ω	N/A	0.25	0.25	0.75	N/A	0.75	4	0.25	50	0.04	0.02
1787-64	1,000 Ω	100 Ω	10 Ω	N/A	0.25	0.25	0.75	N/A	0.75	4	0.10	50	0.02	0.01
1787-645	1,000 Ω	100 Ω	10 Ω	N/A	0.25	0.25	0.75	N/A	0.75	4	0.05	50	0.02	0.01
1787-13	99.9 Ω	9.9 Ω	0.9 Ω	N/A	0.25	0.50	1.0	N/A	1.0	5	0.25	100	0.05	0.03
1787-132	99.9 Ω	9.9 Ω	0.9 Ω	N/A	0.25	0.50	1.0	N/A	1.0	5	0.10	100	0.03	0.02

**① Absolute Tolerance:**

Tolerance of R<sub>A</sub>, R<sub>B</sub>, R<sub>C</sub>, or R<sub>D</sub> when measured in accordance with proper Figure No.

**② Absolute Temperature Coefficient:**

Temperature coefficient of R<sub>A</sub>, R<sub>B</sub>, R<sub>C</sub>, or R<sub>D</sub> from 0°C to +70°C, referenced to +25°C.

**③ Load Life:** Stability of R<sub>A</sub>, R<sub>B</sub>, R<sub>C</sub>, or R<sub>D</sub> with full power applied individually for 2,000 hours at +70°C.

**④ Shelf Life:** Stability of R<sub>A</sub>, R<sub>B</sub>, R<sub>C</sub>, or R<sub>D</sub> for six months at shelf conditions.

**Storage Temperature:** -55°C to +85°C.

**CADDOCK ELECTRONICS, INC.**

e-mail: [caddock@caddock.com](mailto:caddock@caddock.com) • web: [www.caddock.com](http://www.caddock.com)

For Caddock Distributors listed by country see [caddock.com/contact/dist.html](http://caddock.com/contact/dist.html)

Distributor




**amstechnologies**  
where technologies meet solutions

[info@amstechnologies.com](mailto:info@amstechnologies.com)  
[www.amstechnologies-webshop.com](http://www.amstechnologies-webshop.com)

**Contact us** 

# Type 1787 Current Sense Resistor Networks


Figure 1 - Model Nos. 1787-31 and 1787-312

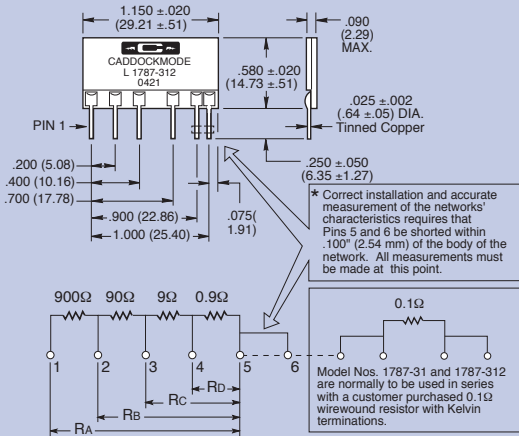

Model Nos. 1787-31 and 1787-312 Measurement Connections

Resistances		Kelvin Connections			
"R"	Total Value	Sense Lead P <sub>1</sub>	Current Lead C <sub>1</sub>	Current Lead C <sub>2</sub>	Sense Lead P <sub>2</sub>
RA	999.9 Ω	Pin 1	Pin 1	Pin 5 *	Pin 6 *
RB	99.9 Ω	Pin 1	Pin 2	Pin 5 *	Pin 6 *
RC	9.9 Ω	Pin 1	Pin 3	Pin 5 *	Pin 6 *
RD	0.9 Ω	Pin 1	Pin 4	Pin 5 *	Pin 6 *


Figure 2 - Model Nos. 1787-41 and 1787-412

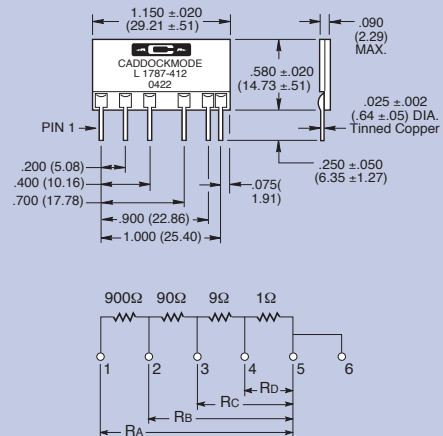

Model Nos. 1787-41 and 1787-412 Measurement Connections


Resistances		Kelvin Connections			
"R"	Total Value	Sense Lead P <sub>1</sub>	Current Lead C <sub>1</sub>	Current Lead C <sub>2</sub>	Sense Lead P <sub>2</sub>
RA	1,000 Ω	Pin 1	Pin 1	Pin 5	Pin 6
RB	100 Ω	Pin 1	Pin 2	Pin 5	Pin 6
RC	10 Ω	Pin 1	Pin 3	Pin 5	Pin 6
RD	1 Ω	Pin 1	Pin 4	Pin 5	Pin 6

Figure 3 - Model Nos. 1787-5, 1787-53, and 1787-535

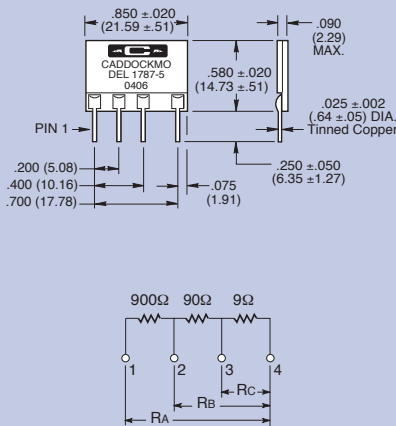


Resistances	
"R"	Total Value
RA	999 Ω
RB	99 Ω
RC	9 Ω

Figure 4 - Model Nos. 1787-6, 1787-64, and 1787-645

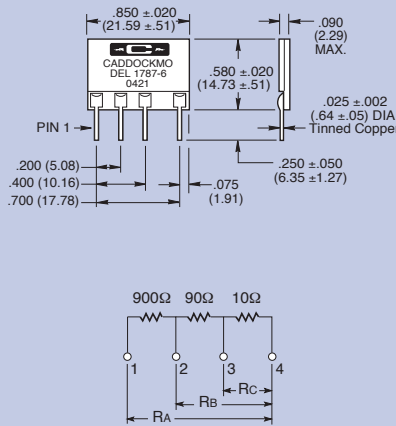

Resistances	
"R"	Total Value
RA	1,000 Ω
RB	100 Ω
RC	10 Ω

Figure 5 - Model Nos. 1787-13 and 1787-132

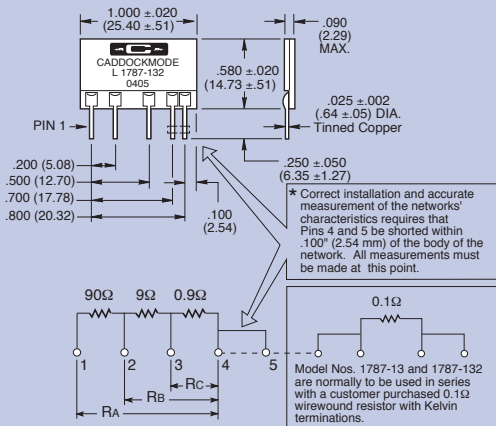

Model Nos. 1787-13 and 1787-132 Measurement Connections

Resistances		Kelvin Connections			
"R"	Total Value	Sense Lead P <sub>1</sub>	Current Lead C <sub>1</sub>	Current Lead C <sub>2</sub>	Sense Lead P <sub>2</sub>
RA	99.9 Ω	Pin 1	Pin 1	Pin 4 *	Pin 5 *
RB	9.9 Ω	Pin 1	Pin 2	Pin 4 *	Pin 5 *
RC	0.9 Ω	Pin 1	Pin 3	Pin 4 *	Pin 5 *

DIMENSIONS IN INCHES AND (MILLIMETERS)

**CADDOCK ELECTRONICS, INC.**

e-mail: [caddock@caddock.com](mailto:caddock@caddock.com) • web: [www.caddock.com](http://www.caddock.com)  
For Caddock Distributors listed by country see [caddock.com/contact/dist.html](http://caddock.com/contact/dist.html)

Distributor  
**amSTECHNOLOGIES**  
where technologies meet solutions

[info@amstechnologies.com](mailto:info@amstechnologies.com)  
[www.amstechnologies-webshop.com](http://www.amstechnologies-webshop.com)

**Contact us**