


## CC4000F & CC4000FP\* COMPACT CABINET COOLER AIR-TO-AIR FLUSH-MOUNT MODEL

Model	Weight	Rating @ 20°C ΔT BTU / hr	Amps Current Draw at 115 volts AC	Fan Size	Dimensions-Inches (H x W x D)
CC4000F	60 lbs	13,700	2.4	8 x 6"	58 x 13-7/8 x 7-7/8


Efficiency: 200.0 Watts / °C ΔT based on average internal cabinet temperature.



Outside View

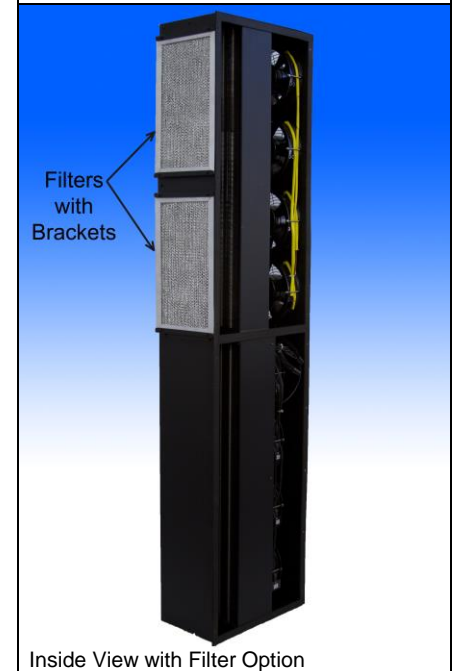

Inside View with Filter Option

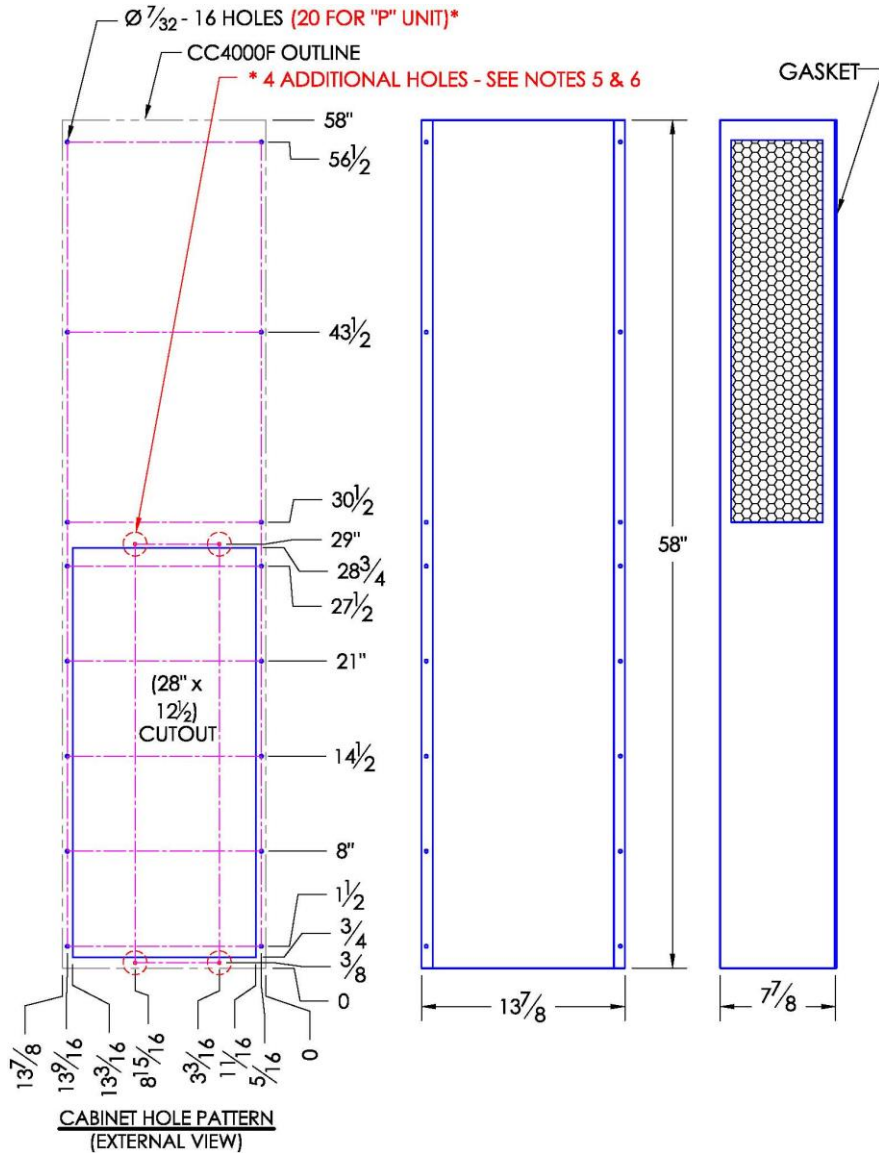

### SPECIFICATIONS

- Rated cooling: 4,000 Watts at 20°C ΔT (200.0 W/°C, mounted to an uninsulated 72" x 36" x 24" cabinet).
- Designed for surface mounting on the outside of cabinet.
- Housing is aluminum (color is black). Stainless steel is available.
- Equipped with mounting gasket to maintain air tight seal.
- \*5. "P" unit is pressure tested to assure water tight seal.
- \*6. Four additional mounting holes are for "P" unit only.
- Available with VAC (115 & 230) and VDC (12, 24, & 48V) fans.
- Unit may be mounted vertically (as shown) or horizontally.
- Optional: inlet air-filter kit available upon request.
- 10. For design, quote, and sizing assistance: call (866) 936 - 6736.**

Subject to change without notice.

Distributor

info@amstechnologies.com  
www.amstechnologies-webshop.com

**amstechnologies**  
where technologies meet solutions

**Contact us**

**NOREN** 1010 O'Brien Drive  
Menlo Park, CA 94025  
650.322.9500  
norenproducts.com

**CC4000F & CC4000FP\***

CCS-PBD-7.2.2-883313-D