

780~890nm High Power In-line Isolator

Description


The high power isolator series includes in-line type, beam expanded isolator, fiber in and free space out isolator and free space isolator etc., They're characterized with low insertion loss, high isolation, high power handling, high return loss, excellent environmental stability and reliability. They are ideal for fiber laser and instrumentation applications.

Key Features

- * High isolation and low insertion loss
- * PM and Non-PM are available
- * Excellent environmental stability and reliability
- * Fiber can be customized

Applications

- * Fiber Laser
- * Fiber Sensor

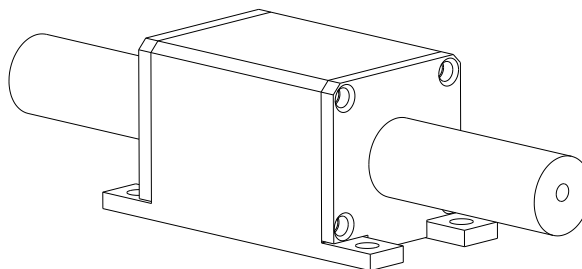

Specifications


Parameter	Type	High power in-line isolator, HP(M)IIT	
		Non-PM isolator	PM isolator
Operating wavelength(nm)		780、808、850、880 or customized	
Bandwidth(nm)		± 5	
Peak isolation (dB)		≥ 25	
Isolation in band at 23℃(dB)		≥ 22	
Insertion loss at 23℃(dB)		≤ 1.5	
Polarization dependent loss (dB)		≤ 0.2	/
Extinction ratio (dB)		/	≥ 18 (Type B) , ≥ 20 (Type F)
Return loss (dB)		≥ 45	
Fiber type (can be customized)		HI 780C or SM800	Panda PM fiber
Input max. power handling (W)		10	
Dimensions (L x W x H mm)		108 x 27 x 27	
Operating temperature(℃)		-5 ~ +50	
Storage temperature(℃)		-20 ~ +70	

*Type B: Both axis working, Type F: Fast axis blocked.

*Back Reflect Power< 10% Max Forward Power.

*The Above specifications is without connector, IL is 0.80dB higher, RL is 5dB lower and ER is 3dB lower for each connector added. The default connector key is aligned to slow, the connector handle power $\leq 0.3W$.

Mechanical Dimensions (Unit: mm)

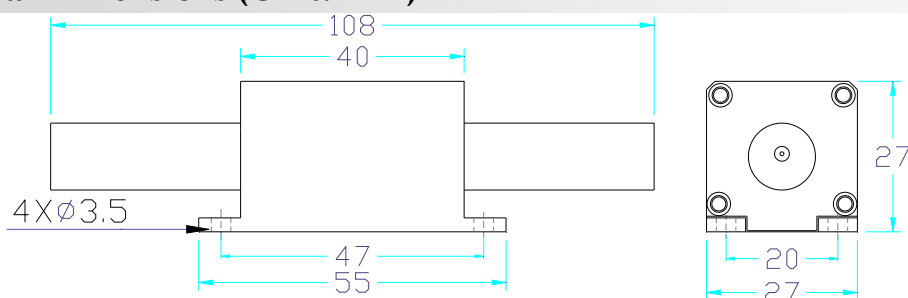

Ordering Information

HP(M)IIT-(X)-XXXX-X-X-X(XX)- X -XX/XX-X*X*X- X

