


ADJUSTMENT PRE-TENSIONING SCREW FITS 5/64 OR 2.0mm HEX, RECOMMENDED TORQUE 20 oz-in (.14 N-m), 2 PLACES.

M2.5 x .16 DEEP THREADED HOLE, 2 PLACES EVENLY SPACED ON A  $\phi$  .660 BOLT CIRCLE, BOTH SIDES.


8-100 THREAD ADJUSTMENT SCREW FITS 5/64 OR 2.0mm HEX, 2 PLACES.

M4 THREADED HOLE OR CLEARANCE FOR M3 CAP SCREW, 2 PLACES.

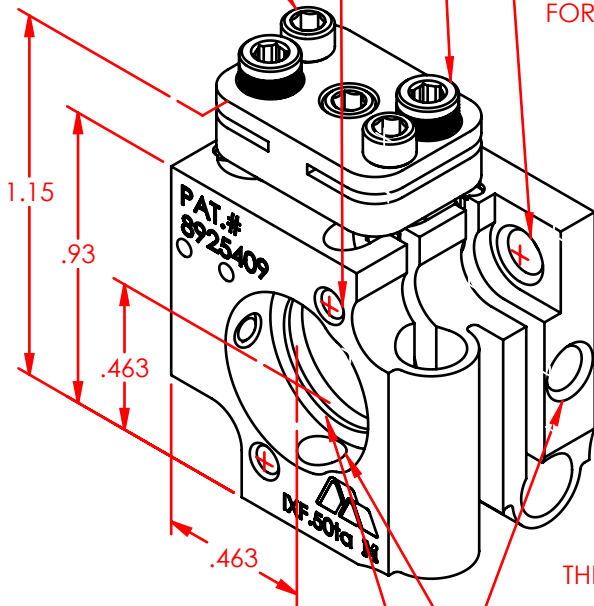

$\phi$  .425 THROUGH CLEARANCE FOR  $\phi$  .50 OPTIC, OPTIC SEAT .165 DEEP, BOTH SIDES.

M4 THREADED MOUNTING HOLE, 2 PLACES.

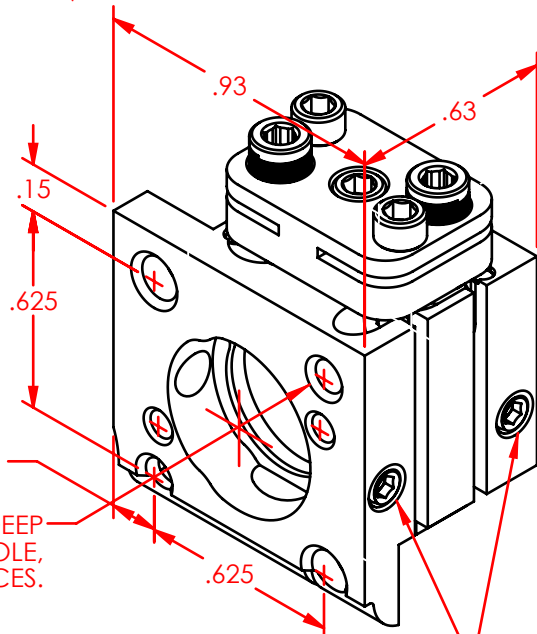

M3 x .18 DEEP THREADED HOLE, 2 PLACES.

M3 SET SCREW FOR HOLDING OPTIC, FITS 1.5mm HEX, 2 PLACES.