

Typical Coating Curves


Visible and NIR Standard Coatings

Coating Type	Range	Reflectance
VA	380 – 700 nm	$R_{\text{avg}} \leq 0.5\%$
VB	600 – 1100 nm	$R_{\text{avg}} \leq 0.6\%$
VC	1050 – 1650 nm	$R_{\text{avg}} \leq 0.5\%$
VQ	1300 – 1700 nm	$R_{\text{avg}} \leq 0.25\%$

Custom coatings are available on request.


VA Coating

$R_{\text{avg}} \leq 0.5\% @ 380 - 700 \text{ nm}$

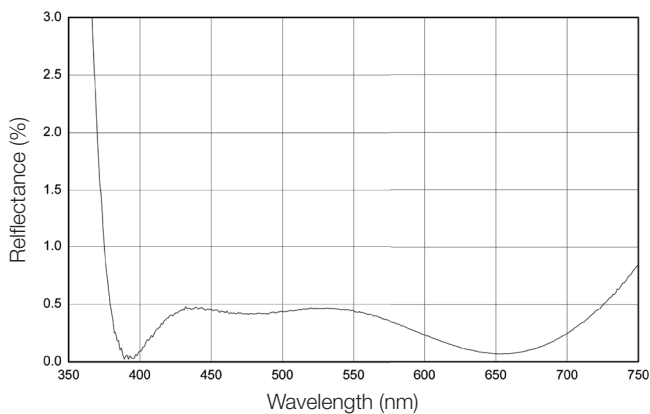


VB Coating

$R_{\text{avg}} \leq 0.6\% @ 600 - 1100 \text{ nm}$

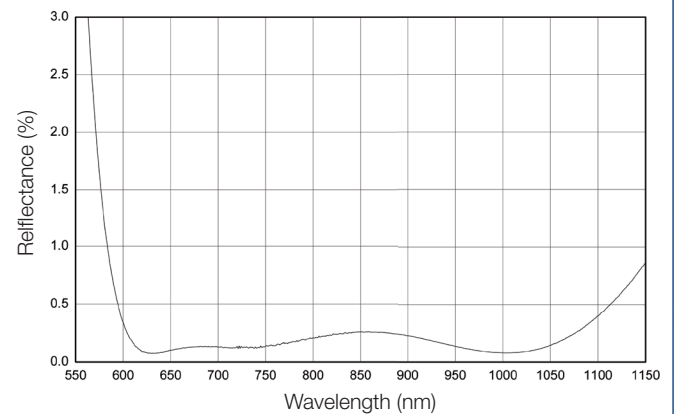


VC Coating

$R_{\text{avg}} \leq 0.5\% @ 1050 - 1650 \text{ nm}$

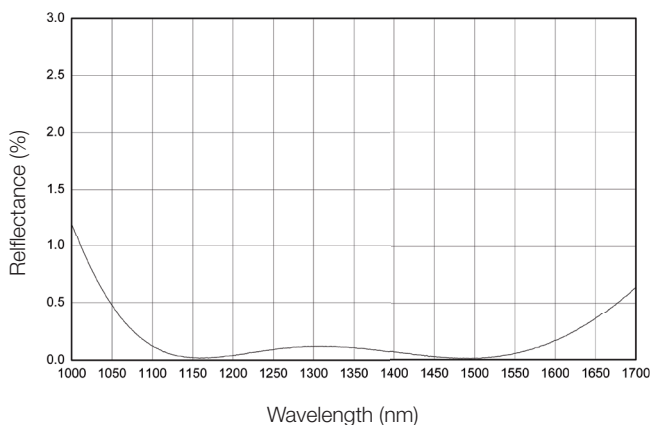

VQ Coating

$R_{\text{avg}} \leq 0.25\% @ 1300 - 1700 \text{ nm}$

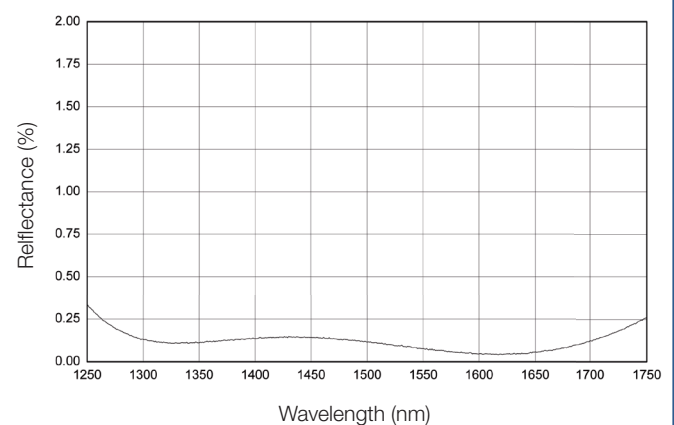

Typical Coating Curves


IR Standard Coatings

Coating Type	Range	Reflectance
RA	8 – 12 μm	$R_{\text{avg}} \leq 0.5\%$
RB	3 – 5 μm	$R_{\text{avg}} \leq 1.0\%$

Custom coatings are available on request.


RA Coating on GH2 Glass

$R_{\text{avg}} \leq 0.5\%$ @ 8 – 12 μm

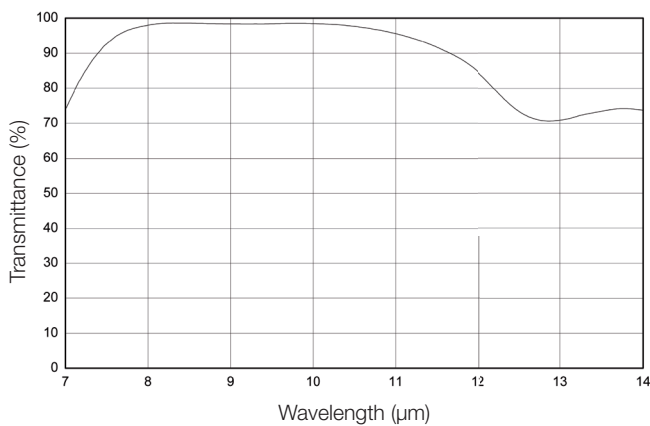

RA Coating on GH6 Glass

$R_{\text{avg}} \leq 0.5\%$ @ 8 – 12 μm

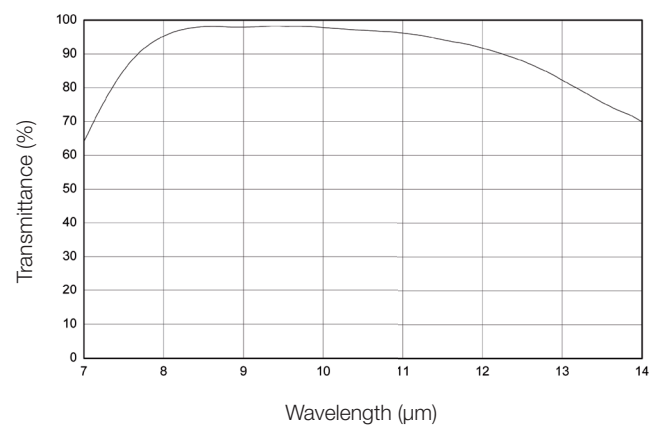

RB Coating on GH2 Glass

$R_{\text{avg}} \leq 1.0\%$ @ 3 – 5 μm

