

# Filterlüfter **LS 2**

Filter Fan



LS 2 K



LS 2 (K)



LS 2

Technische Daten / <b>Technical data:</b>			
<b>Type:</b>	<b>LS 2</b>		
Spannung <b>Voltage</b>	230 V 50/60Hz	115 V 50/60Hz	
Stromaufnahme <b>Amperage</b>	0,3 A	0,53 A	
Leistung <b>Power input</b>	45/39 W	43/41 W	
Drehzahl <b>Speed</b>	2760/3030 min <sup>-1</sup>		
Temperaturbereich <b>Temperature range</b>	-10...+55°C		
Lebensdauer <b>Service life</b>	40.000 h		
Schallpegel <b>Noise level</b>	55 dB (A)		
Zulassung <b>Approval</b>	CE		
Farben <b>colours</b>	RAL 7032 (Standard), RAL 7035 (nur / only K)		
Schutzart <b>Degree of protection</b>	IP 54 (mit Dichtung / with gasket)		
Luftfördermenge / <b>Air flow: (m³/h)</b>			
Filtermatte <b>Filter mat</b>	P15/350S	P15/500S	P15/350S + T3/290S
Luftleistung freiblasend <b>Air flow free air</b>	190	165	125
mit Austrittsfilter LG 12 <b>with exhaust filter</b>	155	130	115

Saugende Ausführung separat bestellen!  
Suction version to be ordered separately!

## Zubehör / **Accessories:**

Austrittsfilter / Exhaust filter

Dichtung / gasket

Ersatzfiltermatte / Replacement filter mat


Thermostate / Thermostats

LG 12 (K)


D 12

AM 1235P, AM 12P, AM 12T

TRS 60, TRW 60, TWR 60, TKW 60

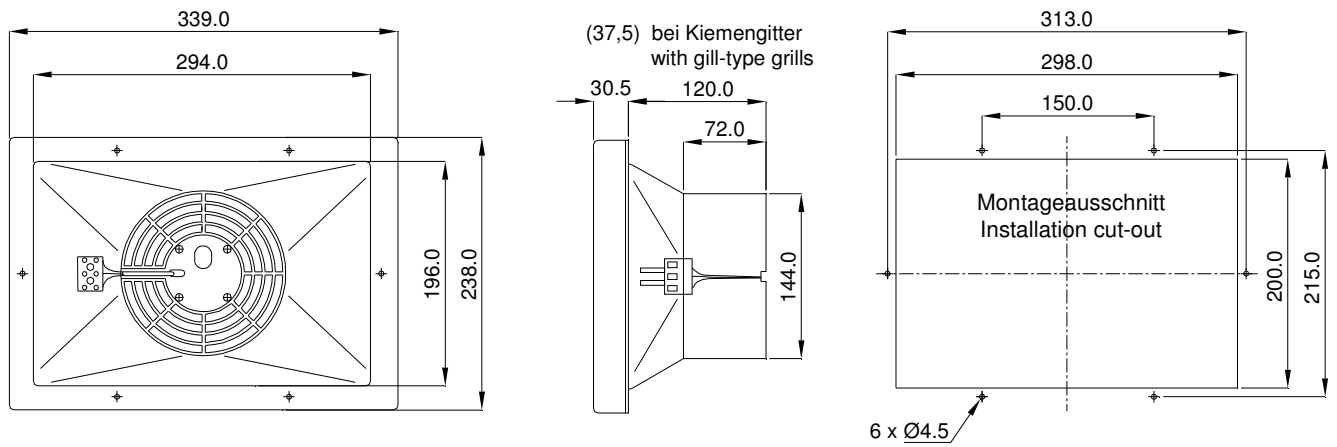

Leistungsdiagramm  
Performance diagram

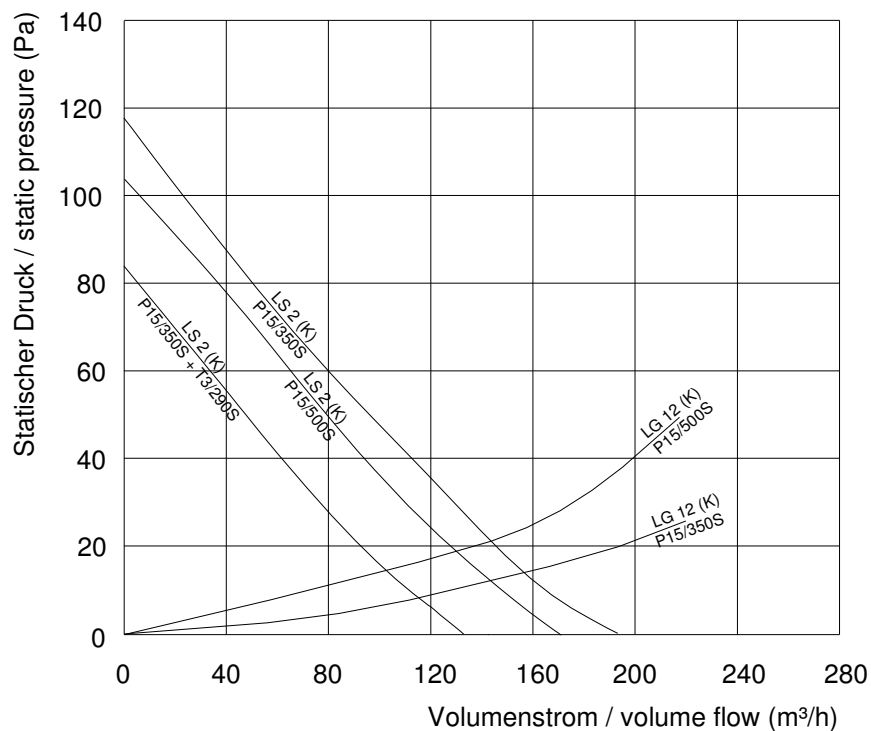

Rev. 03/12

