




| 4 SERIES

MINIATURE SCREENED OPEN FRAMED REED RELAY 3.5 KV, 3.5A

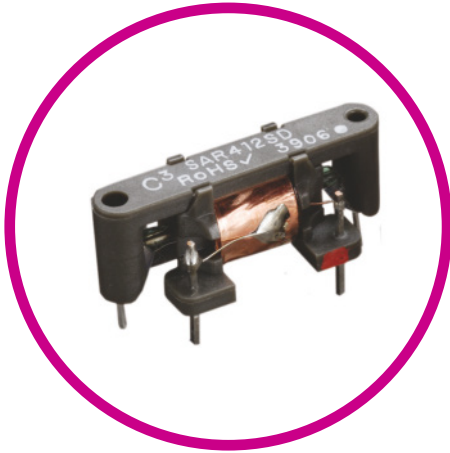

A highly flexible, low cost package for RF applications in the 1-30MHz band. The use of vacuum reed switches with rhodium contacts offers high isolation voltages, low contact resistance and long operating lifetime. Additional RF screening is available to further enhance RF performance for more demanding applications.

Available as Form A (SPNO), Form B (SPNC) or latching (bistable) contact configurations with switch connections via either PCB or flying lead.

Features

- 3.5A RF at 1-30MHz
- 3.5kV Isolation
- Contacts Form A, B or Latching
- Long Lifetime

SPECIFICATIONS

Contact	Unit	Condition	Form A			Form B			Latching	
Contact Material			Rhodium			Rhodium			Rhodium	
Isolation across contacts	kV	DC or AC peak	3			3			3.5	
Max. carry current	A	DC or AC rms	3.5*			3.5*			1.5	
Max. switching power	W		10			10			10	
Max. switching voltage	V	DC or AC peak	20			20			20	
Max. switching current	A	DC or AC peak	0.5			0.5			0.5	
Capacitance across contacts	pF	coil/screen grounded	<0.1			<0.1			<0.1	
Lifetime	operations	dry switching	10 ⁹			10 ⁹			10 ⁹	
Lifetime	operations	10W switching	10 ⁹			10 ⁹			10 ⁹	
Contact Resistance	mΩ	maximum (typical)	80 (30)			80 (30)			80 (30)	
Insulation Resistance	Ω	minimum (typical)	10 ¹⁰ (10 ¹³)			10 ¹⁰ (10 ¹³)			10 ¹⁰ (10 ¹³)	
ESR at 30MHz (no screen)	mΩ	typical	95 @ 3A rms			95 @ 3A rms			200 @ 1.5A rms	
ESR at 30MHz (part screen)	mΩ	typical	80 @ 3A rms			80 @ 3A rms			180 @ 1.5A rms	
Coil			5V	12V	24V	5V	12V	24V	5V	12V
Must Operate	V	DC, 20°C	3.5	8	15	3.5	8	15	3	7
Must Release	V	DC, 20°C	1	2	4	1	2	4	N/A	N/A
Min Pulse Length	ms		N/A	N/A	N/A	N/A	N/A	N/A	2.0	2.0
Operate Time	ms		1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
Release Time	ms	diode fitted	0.5	0.5	0.5	0.5	0.5	0.5	1.0	1.0
Resistance	Ω (± 10%)	20°C	70	380	1500	65	350	1200	85 per coil	500 per coil



Note. The operate / release voltage and coil resistance will change at a rate of 0.4% per degree C. Values are stated at room temperature (20 degrees C)

Contact	Unit	Condition	Form A	Form B	Latching
Construction					
Isolation contact to coil	kV	DC or AC peak	3	3	3.5
Capacitance contact to all other terminals	pF	Contacts open	<1.0	<1.0	<1.0
Capacitance contact to all other terminals	pF	Contacts closed	<1.5	<1.5	<1.5
Environmental Conditions					
Operating temperature range	°C	Limited Current	-40 to +100*	-40 to +100*	-40 to +100*
Storage temperature range	°C		-40 to +125	-40 to +125	-40 to +125
Weight	gm	typical	3.5	4.2	3.1


*see graphical dimensions overleaf.

DIMENSIONS

All dimensions are in millimeters.


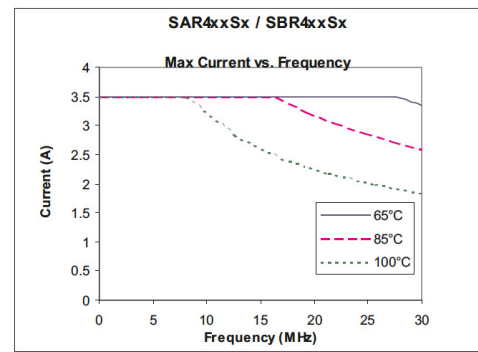
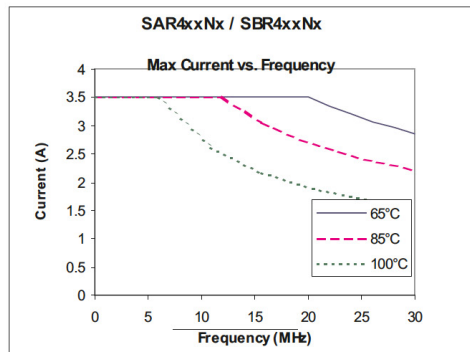


**Flying Lead
(Pins Up)**

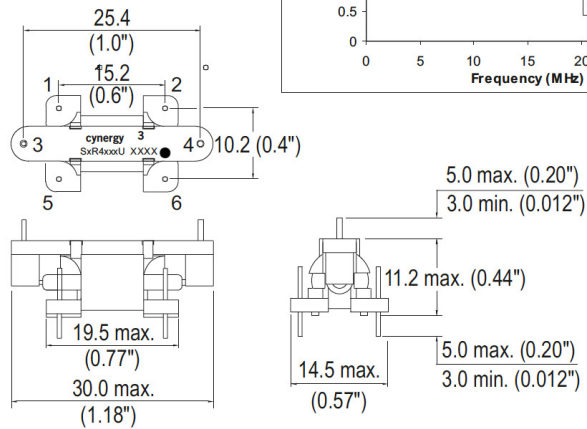


Pins 1, 2, 5 & 6 are 0.635mm square and require 0.9mm +/- 0.05m diameter holes
Pin 3 & 4 are 0.8mm diameter.


**PCB Mount
(Pins Down)**

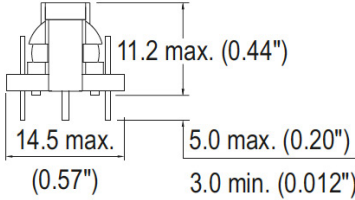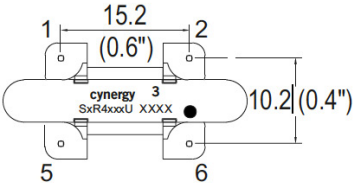


Circuit Diagram, Form A




Circuit Diagram, Form B

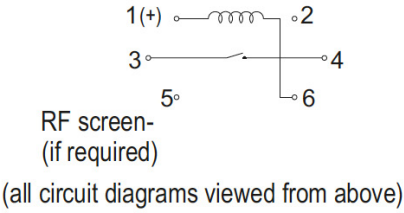

Circuit Diagram, Latching

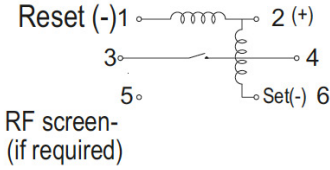

Please refer to this document for circuit design notes:
<https://www.cynergy3.com/blog/reed-relay-application-notes>

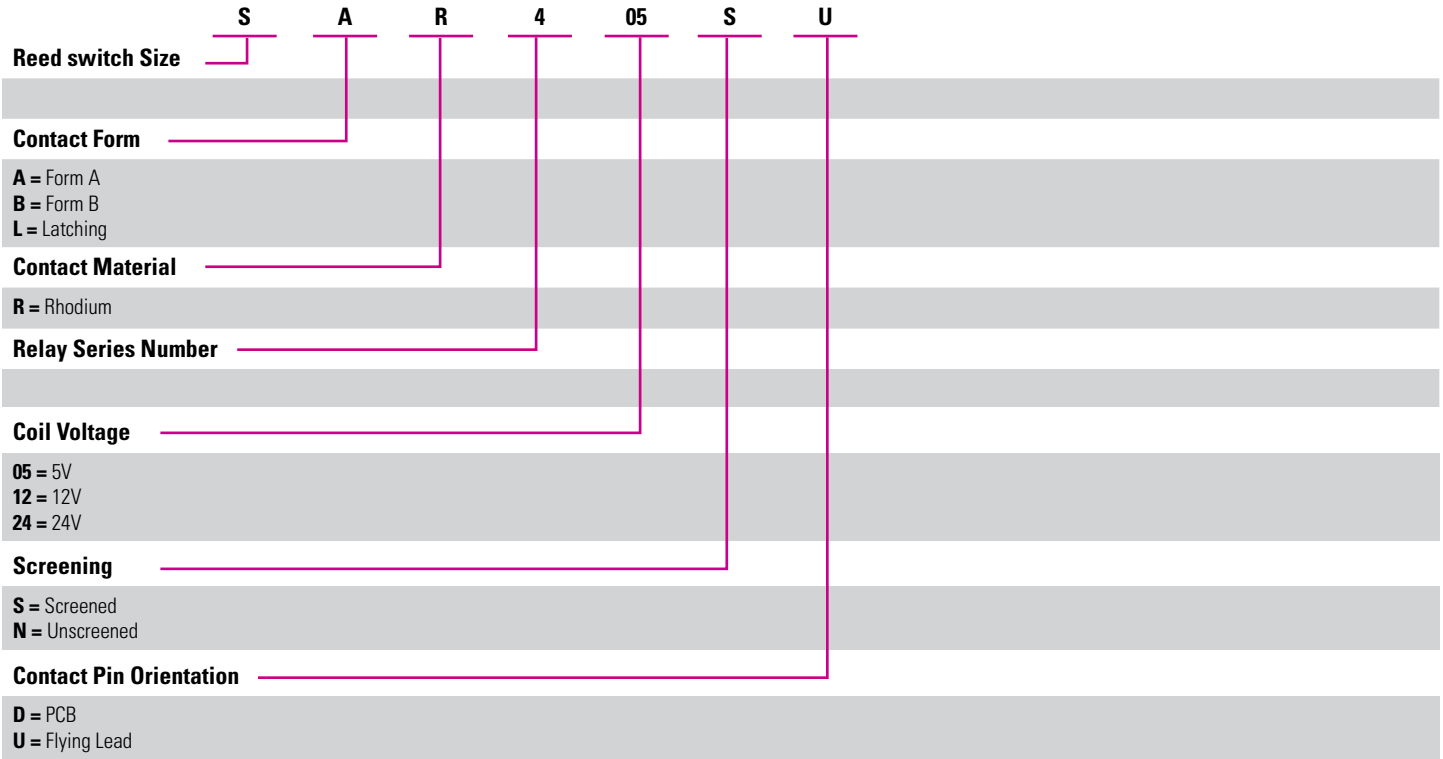

Please refer to this document for circuit design notes:
<https://www.cynergy3.com/blog/reed-relay-application-notes>

info@amstechnologies.com
 www.amstechnologies.com

amSTECHNOLOGIES shop.amstechnologies.com

Get expert guidance now!

Datasheets provided by Sensata Technologies, Inc., its subsidiaries and/or affiliates ("Sensata") are solely intended to assist third parties ("Buyers") who are developing systems that incorporate Sensata products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, valuation, and judgment in designing Buyer's systems and products. Sensata datasheets have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular datasheet. Sensata may make corrections, enhancements, improvements, and other changes to its datasheets or components without notice. Buyers are authorized to use Sensata datasheets with the Sensata component(s) identified in each particular datasheet. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATASHEETS ARE PROVIDED "AS IS". SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATASHEETS OR USE OF THE DATASHEETS, EXPRESS, IMPLIED, OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATASHEETS OR USE THEREOF.

All products are sold subject to Sensata's terms and conditions of sale supplied at www.sensata.com. SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS' PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY, AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS- RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

Mailing Address: Sensata Technologies, Inc., 529 Pleasant Street, Attleboro, MA 02703, USA

CONTACT US

Sensata Technologies
 Jan Tinbergenstraat 80
 7559 SP Hengelo
 The Netherlands
 1-508-236-3800
 +44 (0)1202 897969
cynergy3.enquiries@sensata.com