


A New Direction for Fiber Refractive Index Profiling




IFA-100 Multiwavelength Optical Fiber Analyzer

- **Multiwavelength**
- **No cleave required**
- **Sub- μm spatial resolution**
- **Applicable to any fiber type**
- **Fast measurement time**
- **Measure splices, tapers, couplers**

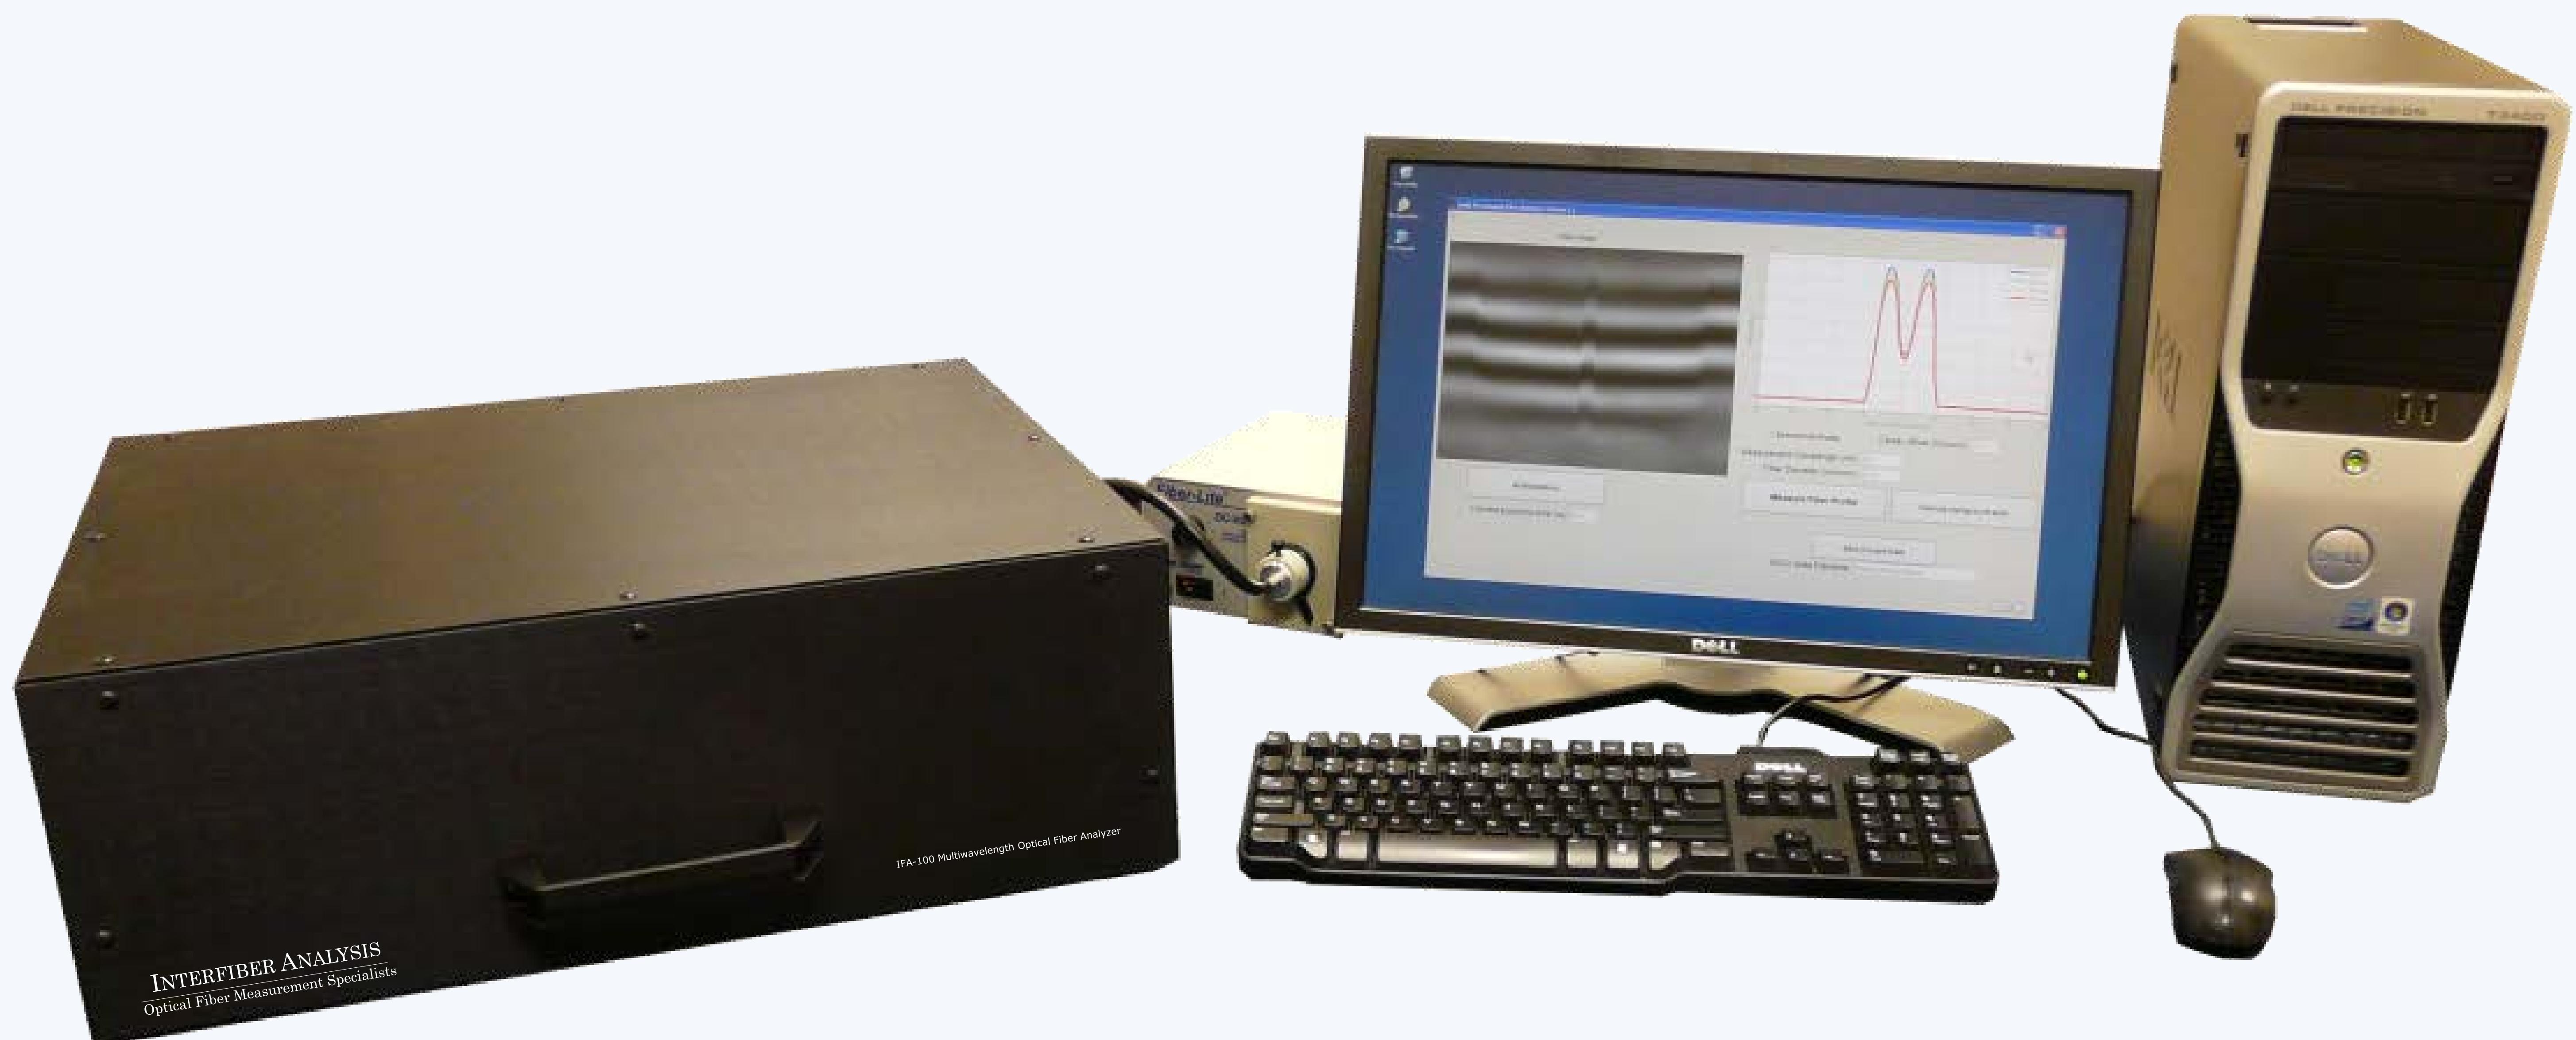

Distributor

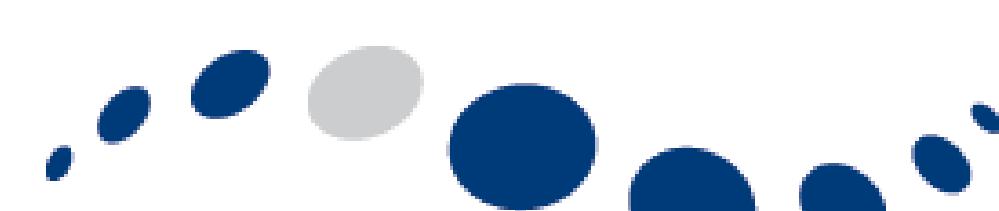



ams TECHNOLOGIES
where technologies meet solutions

info@amstechnologies.com
www.amstechnologies-webshop.com

Contact us



Sample data :

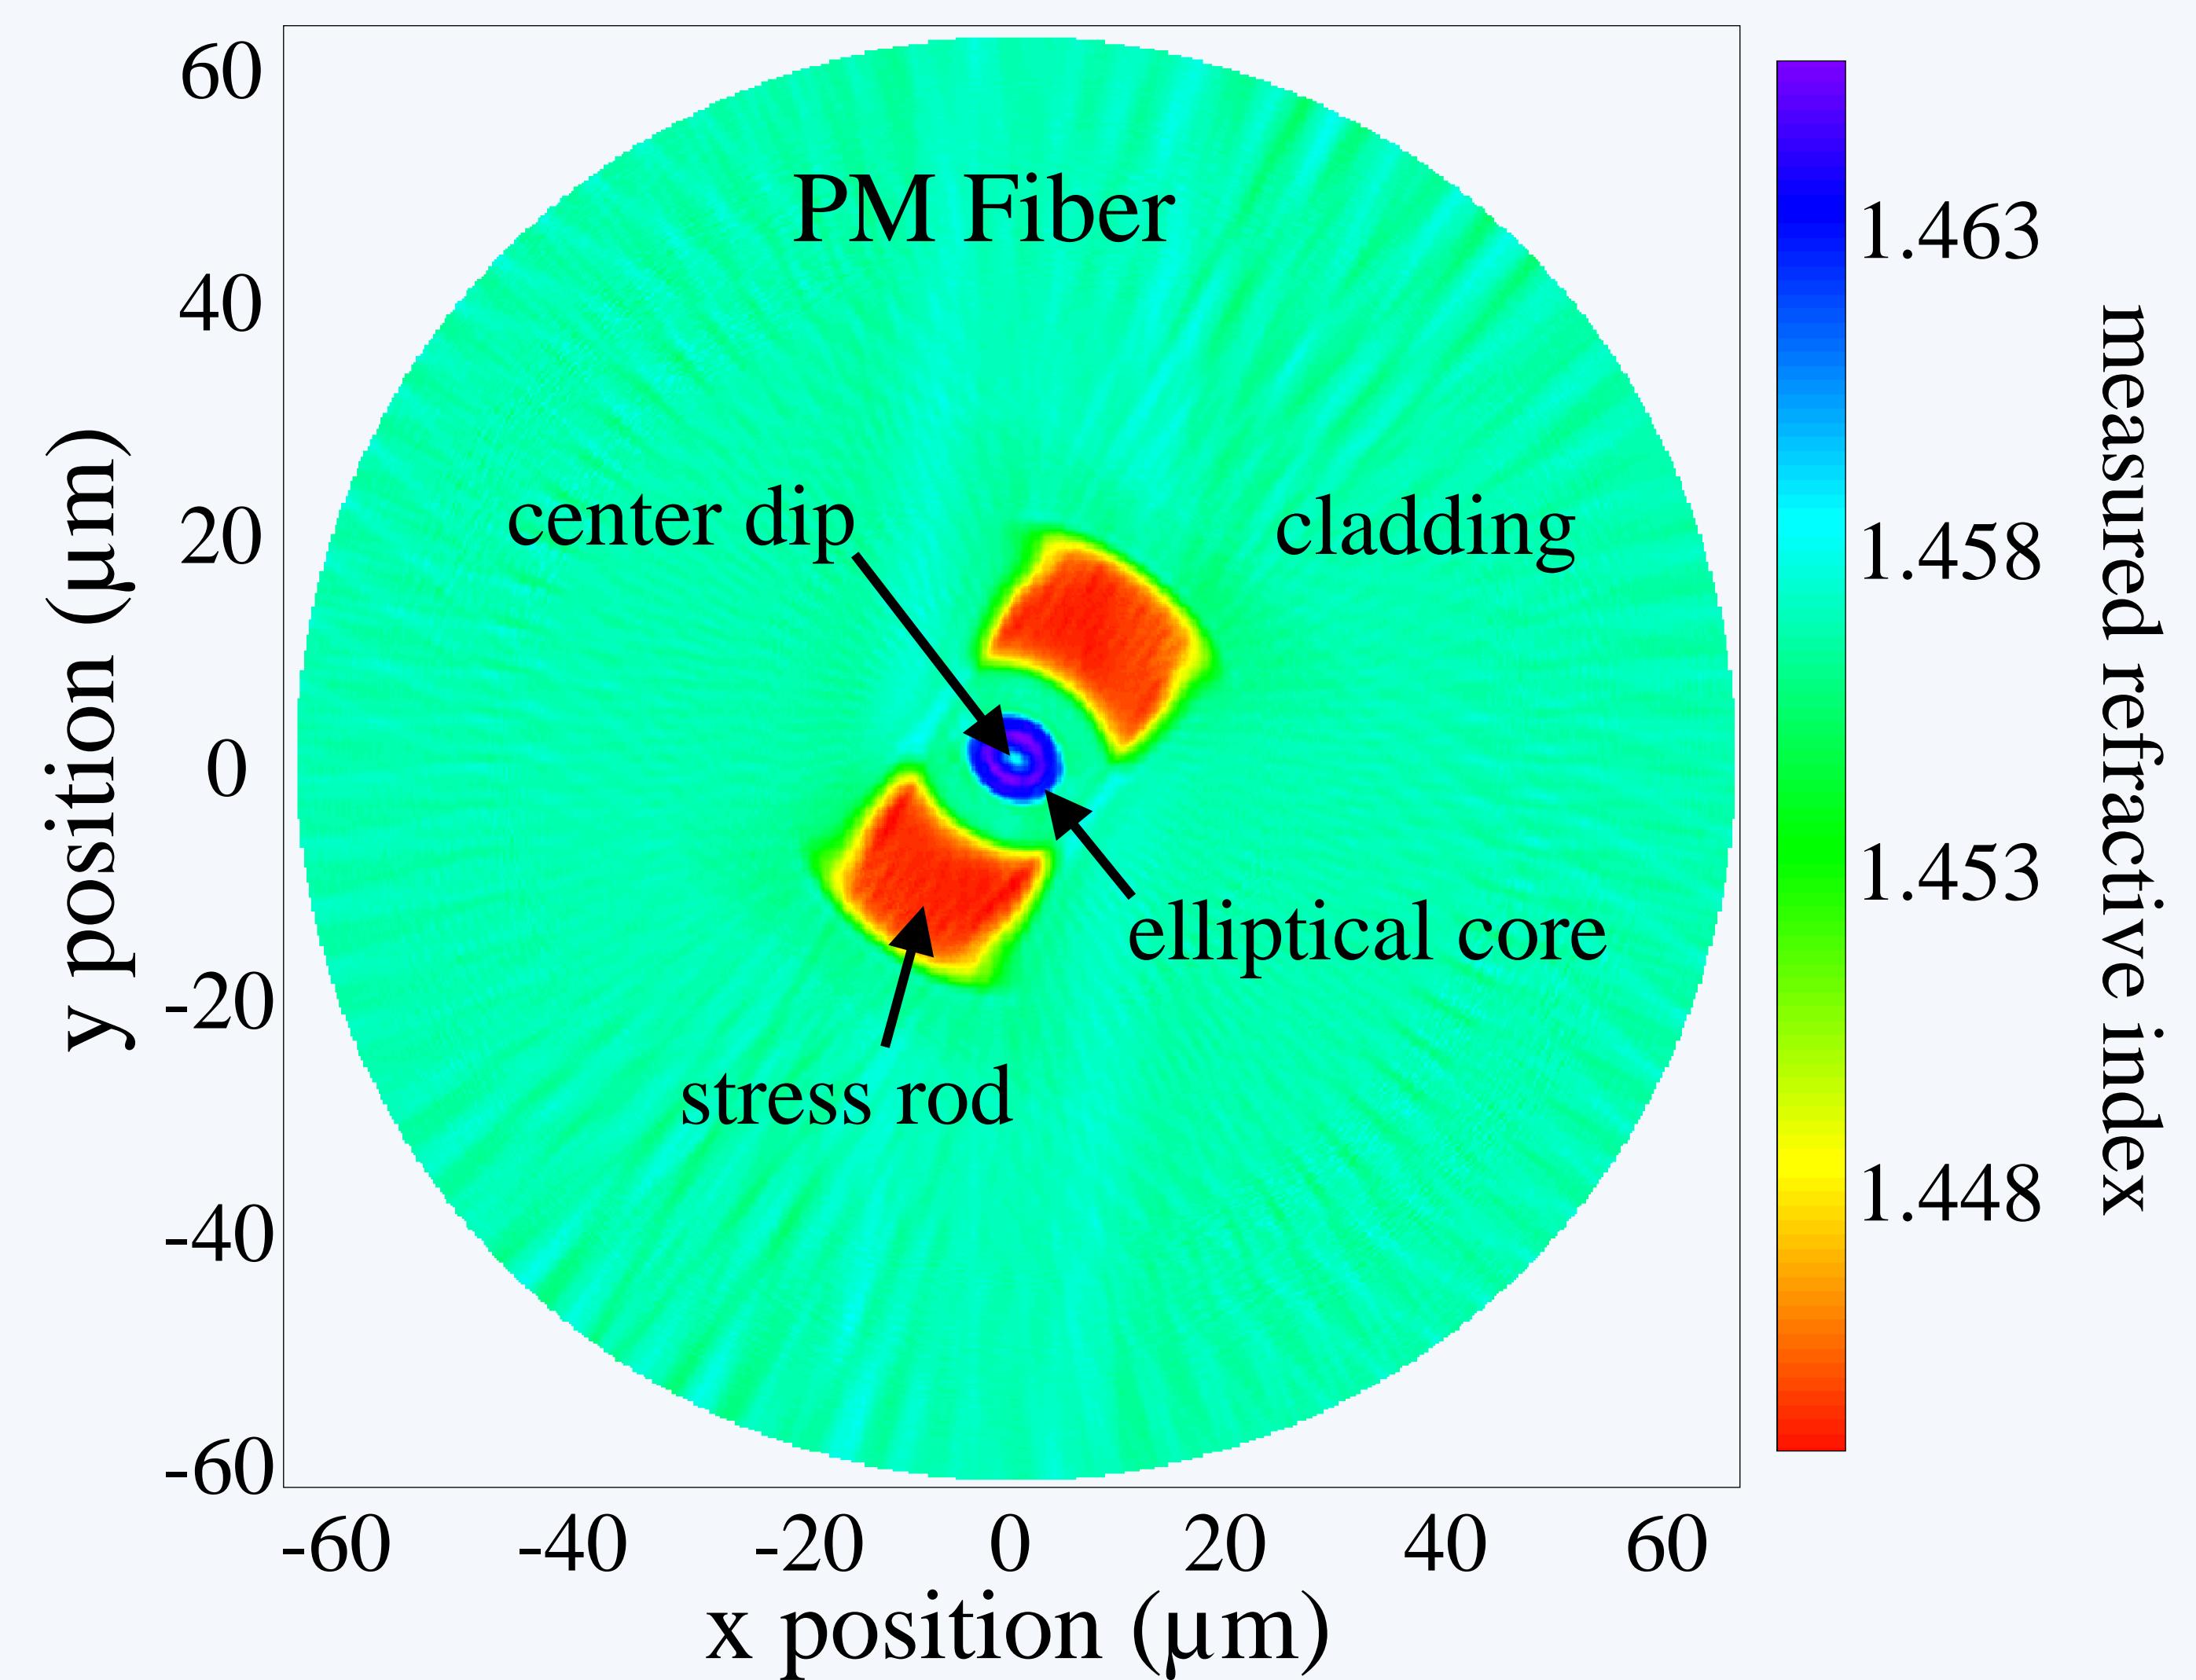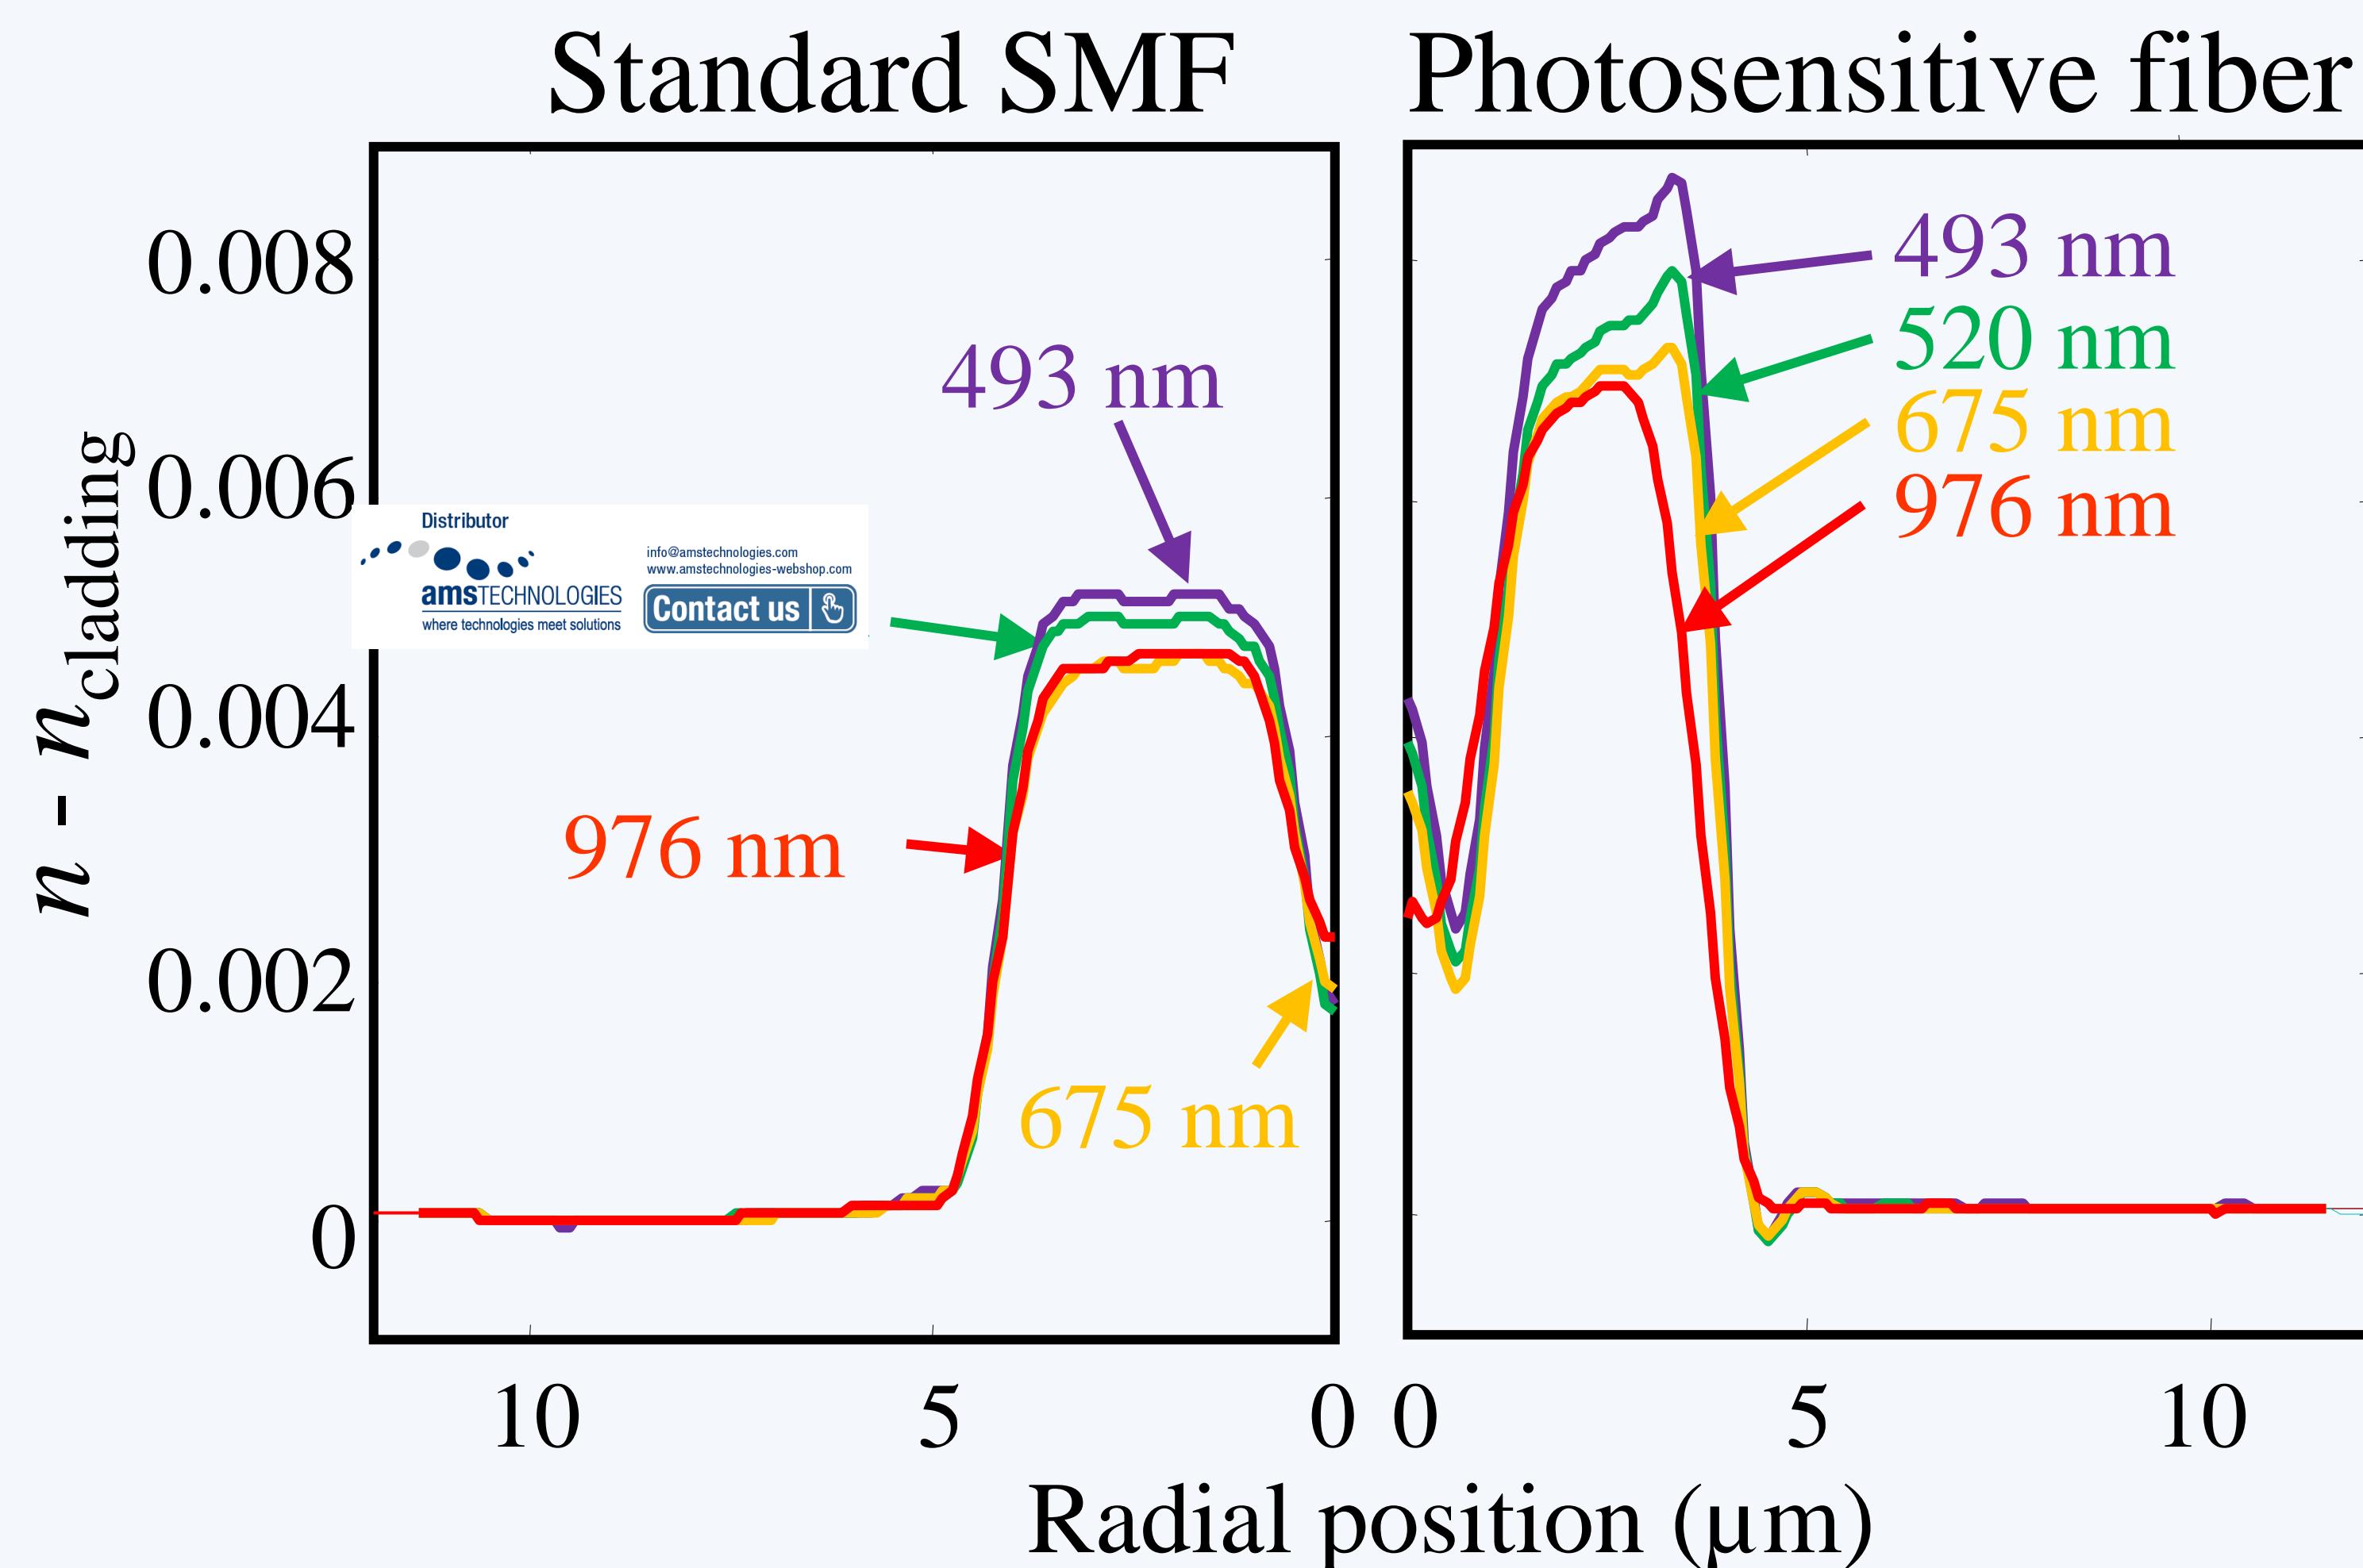


IFA-100 specifications :

Refractive index accuracy	+/- 0.0001
Spatial resolution	$\sim 500 \text{ nm}$
Measurement wavelength	500 nm to 1 μm
Fiber diameter	40 μm to 400 μm
Fiber material	Silica glass, non-silica glass, plastic
Concentricity error measurement	+/- 200 nm
Core non-circularity error measurement	+/- 0.4 %
Fiber type	singlemode, multimode, microstructured (PCF), PM, multicore, rare-earth, cladding-pumped, large mode area, low bend loss, high- Δ , etc.

 **INTERFIBER ANALYSIS**

Distributor

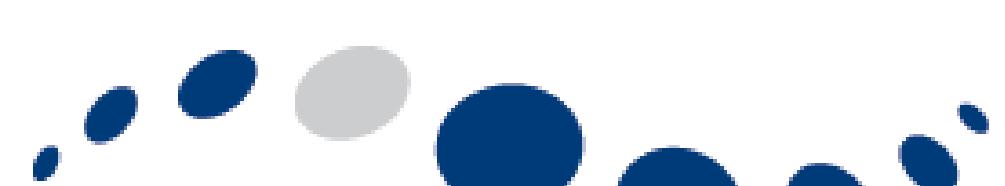

amsTECHNOLOGIES
where technologies meet solutions

info@amstechnologies.com
www.amstechnologies-webshop.com

Contact us 