

Thermopile Detector

TPiD 1S 0222 / 3356

Revision - Date: 2015/12/22

Features and Benefits

- 3.8 x 3.8 mm SMD package
- Thermistor included

Applications

- Pyrometry
- General purpose temperature measurement
- Small space applications



1 General Characteristics

Table 1: Absolute Maximum Ratings

Symbol	Parameter	Min	Typ	Max	Unit	Conditions
T _A	Ambient Temperature Range	-20		100	°C	Operation
T _A	Ambient Temperature Range	-40		100	°C	Storage

2 Type Characteristics

2.1 Design Characteristics

The detector fully complies with the European RoHS environmental directives against the use of hazardous materials in electrical and electronic equipment.

Table 2: Design Characteristics

Parameter	Description
Package	3.8 x 3.8 mm CLCC package
Filter	Si-based interference long pass filter
Temperature reference	Thermistor 100 kΩ

Distributor



where technologies meet solutions



AZPECT
part of

nordics@amstechnologies.com
azpect.amstechnologies.com

Contact us 

2.2 Electrical Characteristics

Table 3: Thermopile Characteristics

Symbol	Parameter	Value	Unit	Conditions
A	Sensitive Area	0,7 x 0,7	mm ²	Absorber area
R _{TP}	Thermopile Resistance	50...100	kΩ	25 °C
R	Responsivity	45	V/W	500 K, 1Hz, without filter
t	Time Constant	22	ms	
V _N	Noise Voltage	35	nV/√Hz	25 °C
D*	Specific Detectivity	1,2	10 ⁸ cm√Hz/W	25 °C
TC _{RTP}	Temperature Coefficient of Resistance	0,03	%/K	
TC _R	Temperature Coefficient of Responsivity	-0,05	%/K	
FoV	Field of View	120	Degrees	At 50 % intensity points
R25	Thermistor Base Resistance	100 ± 5	kΩ	Tamb = 25°C
β	Thermistor BETA -Value	4092	K	Defined at 25°C / 100°C
β	Thermistor BETA -Value Tolerance	± 1	%	

2.3 Mechanical Drawing

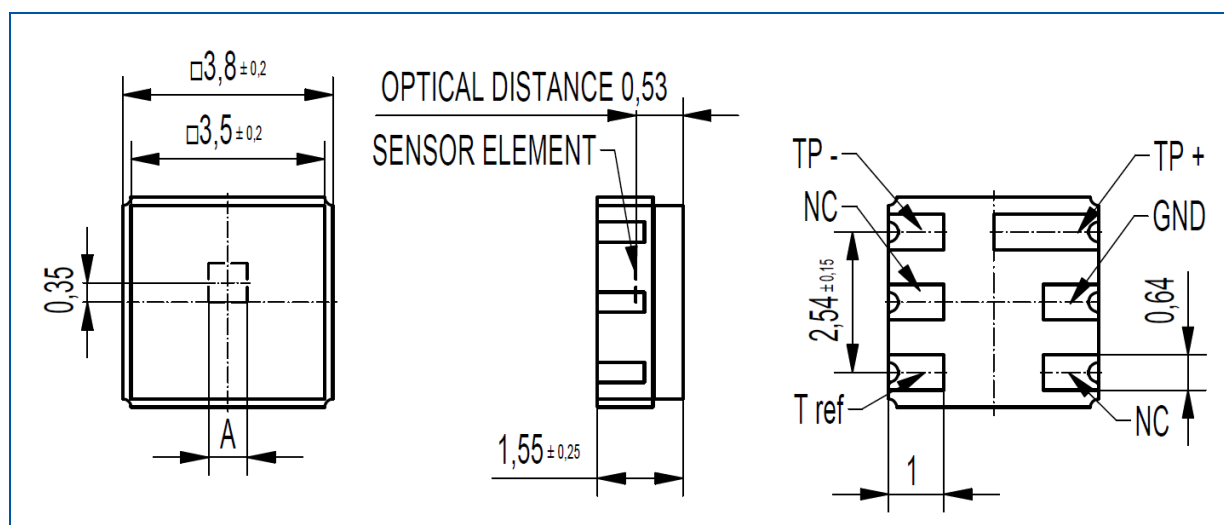


Figure 1 Mechanical drawing of detector TPiD 1S 0222

2.4 Soldering

The detector TPiD 1S 0222 is a lead-free component and fully complies with the RoHS regulations, especially with existing roadmaps of lead-free soldering. Reflow soldering is recommended. A typical lead free reflow profile is shown in figure 2. Specific reflow soldering parameters depend on the solder alloy used.

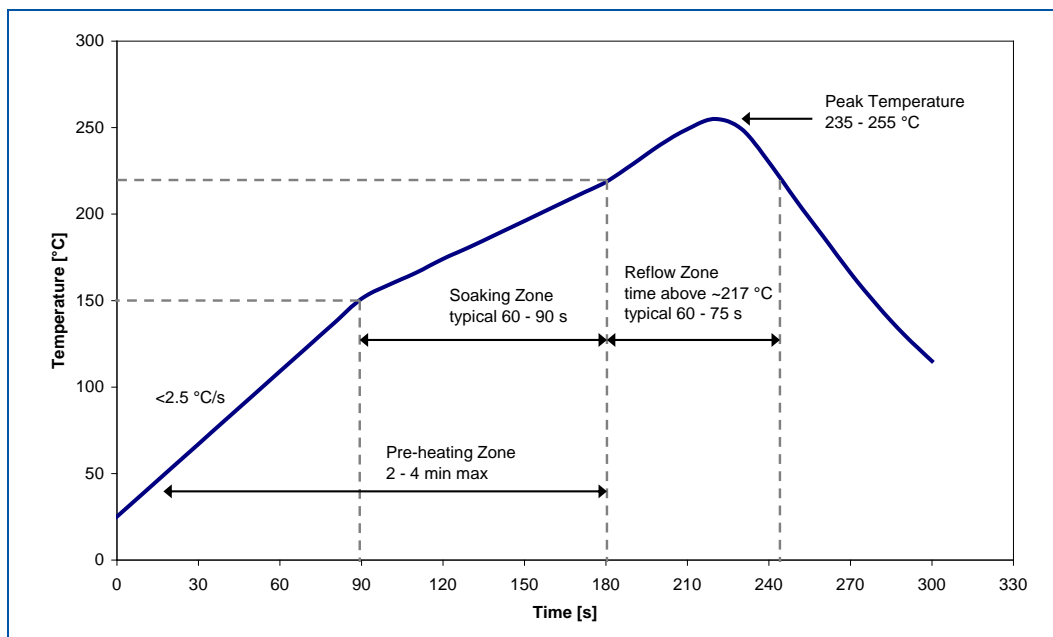


Figure 2 Typical Lead Free Reflow Profile

2.5 Handling Requirements

Stresses above the absolute maximum ratings may cause damages to the device. Do not expose the detector to aggressive detergents such as Freon, Trichloroethylene, etc. Windows may be cleaned with alcohol and cotton swab.

3 Quality Statement

Excelitas Technologies is an ISO 9001 certified manufacturer. All devices employing PCB assemblies are manufactured according to IPC-A-610 guidelines.

3.1 Liability Policy

The contents of this document are subject to change without notice and customers should consult with Excelitas Technologies sales representatives before ordering. Customers considering the use of Excelitas Technologies thermopile devices in applications where failure may cause personal injury or property damage, or where extremely high levels of reliability are demanded, are requested to discuss their concerns with Excelitas Technologies sales representatives before such use. The Company's responsibility for damages will be limited to the repair or replacement of defective product. As with any semiconductor device, thermopile sensors or modules have a certain inherent rate of failure. To protect against injury, damage or loss from such failures, customers are advised to incorporate appropriate safety design measures into their product.

Distributor



AZPECT
part of
amSTECHNOLOGIES

where technologies meet solutions

nordics@amstechnologies.com
azpect.amstechnologies.com

Contact us 