


## FRD12000 SERIES

RF RELAY, SCREENED, 8KV, 6A

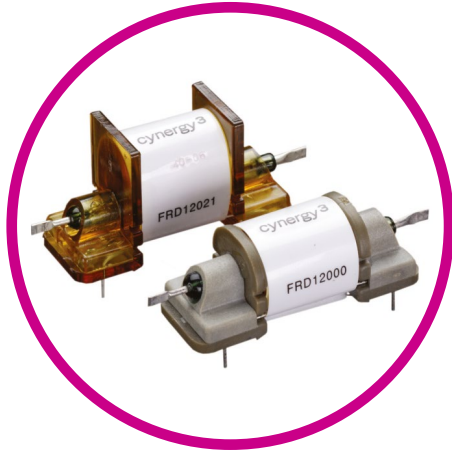

An open frame RF reed relay with 8kV isolation and 6A (at 30MHz) carry current, the FRD12000 series has been used in many HF radio systems over the years, with applications in commercial maritime (GMDSS) equipment and military HF radio units worldwide. The use of vacuum reed switches with rhodium contacts offers high isolation voltages, low contact resistance and long operating lifetime.

Available as Form A (SPNO) or Form B (SPNC) contact configurations.

### Features

- Up to 8kVDC Isolation between Contacts
- 6A Carry Current (up to 30MHz)
- Excellent RF Performance
- Ideal for Antenna Tuning Units
- Form A/B Contact Configuration
- Customizing Facility

## SPECIFICATIONS

Contact	Units	Condition	FRD12014	FRD12015	FRD12021	FRD12049
Action (form A, B or Latching)		A	A	A	B	B
Carry Current	A	RMS max	6	6	6	6
Switching Current	A	DC max	1	1	1	1
Switching Power	W	DC max	20	20	20	20
Switching Voltage	V	DC max	20	20	20	20
Isolation	kV	DC max	8	8	8	8
Capacitance	pF	coil/screen gnd	0.4	0.4	0.6	0.6
Lifetime	operations	dry switching	10 <sup>9</sup>	10 <sup>9</sup>	10 <sup>9</sup>	10 <sup>9</sup>
Contact Resistance	mOhms	maximum (typical)	50 (15)	50 (15)	50 (15)	50 (15)
Insulation Resistance	Ohms	minimum (typical)	10 <sup>10</sup> (10 <sup>13</sup> )	10 <sup>10</sup> (10 <sup>13</sup> )	10 <sup>10</sup> (10 <sup>13</sup> )	10 <sup>10</sup> (10 <sup>13</sup> )
ESR at 4.5A, 30MHz	mOhms	typical	100	100	150	150
<b>Coil at 20°C</b>						
Nominal Working Voltage	VDC		12	24	12	24
Must Operate	VDC	max	8	15	8	14
Must Release	VDC	min	2	2	2	4
Nominal Resistance	Ohms	+/-10%	340	1000	380	1500
RF Screening			Part	Part		
RF Screening Connection		pin position	2 & 5	2 & 5		
Coil Connections		pin position	1 & 6	1 & 6	1 & 6	1 & 6

Relay	Unit	Condition	FRD12014	FRD12015	FRD12021	FRD12049
<b>Operate Time (Including Bounce)</b>	ms		3	2	3	3
<b>Release Time</b>	ms		1	1	2	2
<b>Isolation Contact to all other Terminals</b>	kV	DC max	10	10	10	10
<b>Isolation Coil to Screen</b>	kV	DC max	0.5	0.5	N/A	N/A
<b>Capacitance Contact to all other Terminals</b>	pF	contacts open	2.0	2.0	2.5	2.5
<b>Environmental Conditions</b>						
<b>Storage Temperature Range</b>	°C		-55 to +125			
<b>Operating Temperature Range</b>	°C	Limited current*	-40 to +85			
<b>Shock</b>	g	11ms 1/2 sine pk	100			
<b>Bump</b>	g	6ms 1/2 sine pk	40			
<b>Vibration</b>	g	10- 500Hz	10			
<b>Weight</b>	gm		24	24	33	33

\* see graphical data.

Please refer to this document for circuit design notes:

<https://www.cynergy3.com/blog/reed-relay-application-notes>



## DIMENSIONS






All dimensions are in millimeters.



**amSTECHNOLOGIES**  
where technologies meet solutions

info@amstechnologies.com  
www.amstechnologies-webshop.com

**Contact us**

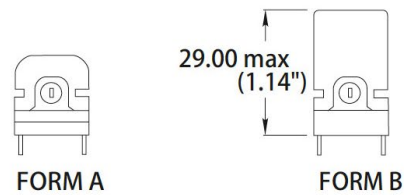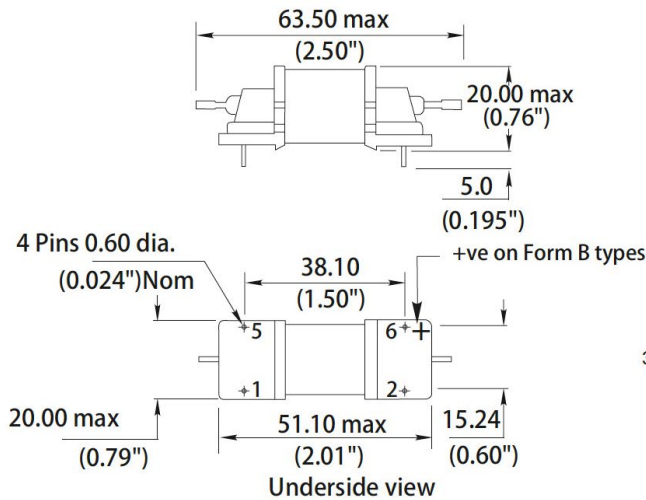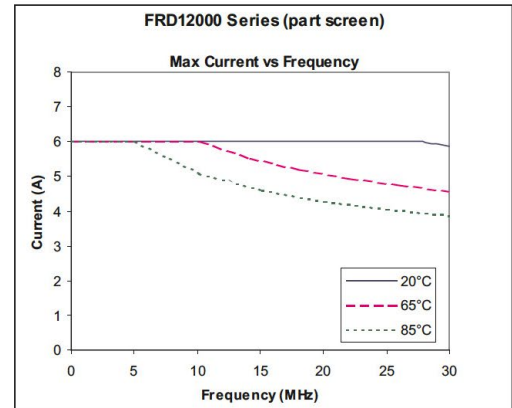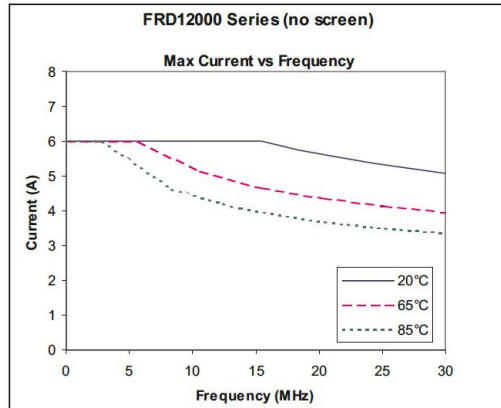

Please refer to this document for circuit design notes:

<https://www.cynergy3.com/blog/reed-relay-application-notes>

Made in the UK

Page 3

Sensata Technologies, Inc. ("Sensata") data sheets are solely intended to assist designers ("Buyers") who are developing systems that incorporate Sensata products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, evaluation and judgment in designing Buyer's systems and products. Sensata data sheets have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular data sheet. Sensata may make corrections, enhancements, improvements and other changes to its data sheets or components without notice.

Buyers are authorized to use Sensata data sheets with the Sensata component(s) identified in each particular data sheet. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATA SHEETS ARE PROVIDED "AS IS". SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATA SHEETS OR USE OF THE DATA SHEETS, EXPRESS, IMPLIED OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATA SHEETS OR USE THEREOF.

All products are sold subject to Sensata's terms and conditions of sale supplied at [www.sensata.com](http://www.sensata.com) SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS' PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS-RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

Mailing Address: Sensata Technologies, Inc., 529 Pleasant Street, Attleboro, MA 02703, USA.