

# PIN Photodiodes

For Industrial Applications


Distributor



**AZPECT**  
part of  
**amsTECHNOLOGIES**  
where technologies meet solutions

nordics@amstechnologies.com  
azpect.amstechnologies.com

**Contact us** 

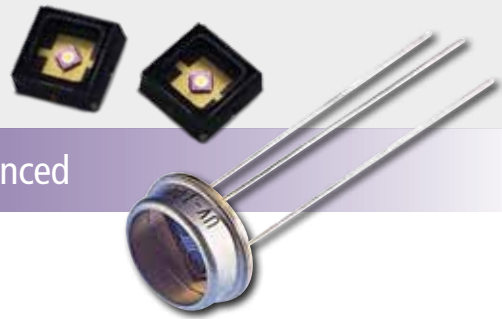

## InGaAs and Si PIN Diodes – Quadrant Detectors – UV-Enhanced

### Applications

- LiDAR
- Telecom
- Instrumentation
- Photometry
- Laser power monitoring
- Fiber optic test equipment
- High speed switching
- Spot tracking
- Laser range finders
- Missile guidance
- Laser warning system

### Features and Benefits

- High speed
- High responsivity
- Hermetically-sealed
- Large area available
- High shunt resistance, low dark current
- Customization available upon request

### Product Description

Silicon PIN photodiodes are available in a wide variety of active areas to accommodate a large range of applications. The PIN structure allows high quantum efficiency and fast response for detection of photons in the 400 nm to 1100 nm range.

The YAG series offers an exceptional 0.4 A/W at 1060 nm by using a thick silicon material. Designed with a guard ring to collect current generated outside of the active area, they are the detectors of choice when the entire chip is illuminated by reducing unwanted carriers responsible for noise. Precise beam positioning can be achieved by using our quadrant detectors. They are designed with 4 pie-shaped quadrant sections created via the doping process, thus reducing the "dead" space between each quadrant to almost zero. Each quadrant is then connected to an isolated lead.

The C30741 provides fast response and good quantum efficiency in the spectral range between 300 nm to 1100 nm. Designed for high-speed, high-volume production and cost-sensitive applications, these photodiodes are offered in plastic TO-style packages with a visible blocking filter option.

Our UV series are high quality Si PIN photodiodes in hermetically-sealed TO packages designed for the 220 nm to 1100 nm wavelength region with enhanced operation in the UV range. Low noise detection is achieved by operating the UV series in photovoltaic mode (0 V bias).

The InGaAs PIN detectors provide high quantum efficiency from 800 nm to 1700 nm. They feature low capacitance for extended bandwidth, high resistance for high sensitivity, high linearity, and uniformity within 2 % across the detector active area.

Product Table

### InGaAs PIN, High Speed, Peak Wavelength at 1550 nm

Unit	Active Diameter	Responsivity Peak	Capacitance	Bw	Dark Current	Breakdown Voltage	Operating Voltage	Package
	µm	A/W						
<b>C30617BH</b>	100	0.95	0.8	3.5	<1	100	5	TO-18, ball lens
<b>C30617BFCH</b>	100	0.95	0.8	3.5	<1	100	5	TO-18, FC receptacle
<b>C30617BSCH</b>	100	0.95	0.8	3.5	<1	100	5	TO-18, SC receptacle
<b>C30617BQC-04-XX</b>	100	0.95	0.8	3.5	<1	100	5	TO-18 ST receptacle
<b>C30617ECERH</b>	100	0.95	0.6	3.5	<1	100	5	Ceramic carrier
<b>C30617L-100</b>	100	0.95	0.6	3.5	<1	100	5	SMT
<b>C30618BFCH</b>	350	0.95	4	0.75	1	100	5	TO-18, FC receptacle
<b>C30618GH</b>	350	0.95	4	0.75	1	100	5	TO-18
<b>C30618ECERH</b>	350	0.95	4	0.75	1	100	5	Ceramic carrier
<b>C30618L-350</b>	350	0.95	4	0.75	1	100	5	SMT

## Product Table

## InGaAs PIN, Large Area, Peak Wavelength at 1550 nm

Unit	Active Diameter mm	Responsivity Peak A/W	Capacitance pF	Shunt Resistance Mega Ohm	B <sub>w</sub> MHz	Dark Current nA	Breakdown Voltage V	Operating Voltage V	Package
C30619GH	0.5	0.95	8	250	750	1	80	0-10	TO-18
C30641EH-TC	1	0.95	8	50	350	1	80	0-5	TO-8, flange, TE-cooled
C30641EH-DTC	1	0.95	40	50	75	5	80	0-5	TO-8, flange, dual TE
C30641GH	1	0.95	40	50	75	5	80	0-5	TO-18
C30642GH	2	0.95	150	25	20	10	50	0-5	TO-5
C30665GH	3	0.95	200	10	3	25	50	0-5	TO-5
C30723GH	5	0.95	950	5	3	-	50	0-5	TO-5

## Product Table

## Silicon PIN

Unit	Active Diameter mm	Active Area mm <sup>2</sup>	Responsivity Peak A/W	Peak Wavelength nm	Capacitance pF	Rise Time ns	Dark Current nA	Shunt Resistance MΩ	Breakdown Voltage V	Operating Voltage V	Package
C30741PH-15S	1.5 x 1.5	2.25	0.47	800	11	2	0.05	-	300	10	Plastic T-1¼ through-hole
C30741PFH-15S	1.5 x 1.5	2.25	0.47	800	11	2	0.05	-	300	10	T-1¼ visible blocking
C30807EH	1	0.8	0.6	900	2.5	5	10	-	>100	45	TO-18
C30808EH	2.5	5	0.6	900	5	12	30	-	>100	45	TO-5
C30809EH	8	50	0.6	900	25	12	25	-	>100	45	TO-8
C30810EH	11	100	0.6	900	45	15	83	-	>100	45	TO, 1.25 inch dia.
C30822EH	5	20	0.6	900	12	12	50	-	>100	45	TO-8
FFD-100H	2.5	5.1	0.6	850	8.5	3.5	5	-	>125	15	TO-5
FFD-200H	5	20	0.6	850	30	5	10	-	>125	15	3 pin, 0.6 inch dia.
FND-100GH	2.5	5.1	0.64	920	8.5	<1n	10	-	150	90	TO-5
FND-100QH	2.5	5.1	0.64	920	8.5	<1n	10	-	150	90	TO-5, response down to 200 nm
UV-040BQH	1	0.81	0.62	900	25	-	-	>2000	-	0	TO-5, response down to 200 nm
UV-100BQH	2.5	5.1	0.62	900	120	-	-	>1000	-	0	TO-5, response down to 200 nm
UV-215BGH/340	5.5	23.4	0.6	900	450	-	-	>250	-	0	TO-5, response down to 250 nm
UV-215BQH	5.5	23.4	0.62	900	450	-	-	>215	-	0	TO-5, response down to 200 nm
UV-245BGH	5	18.5	0.62	900	375	-	-	>375	-	0	TO-5, response down to 250 nm
UV-245BQH	5	18.5	0.62	900	375	-	-	>375	-	0	TO-5, response down to 200 nm
YAG-100AH	2.5	5.1	0.7	1000	12	5	<20	-	>200	180	TO-5
YAG-200H	5	20	0.7	1000	12	5	<100	-	>200	180	TO-8
YAG-444AH	11.3	100	0.7	1000	13	5	<200	-	>200	180	TO-36

## Product Table

## Specialty Silicon Detectors

Unit	Description	Active Diameter mm	Active Area mm <sup>2</sup>	Capacitance pF	Rise/Fall Time ns	Dark Current nA	Breakdown Voltage min V	Responsivity 900 nm A/W	Responsivity 1060 nm A/W	Noise Current pA/sqrt(Hz)	Package
C30845EH	900 nm Quadrant PIN	8	50	8	12	70 nA	200	0.6	0.17	0.26	TO-8
YAG-444-4AH**	1064 nm Quadrant PIN	11.5	100	9	12	30	200	0.6	0.5	0.2	Custom
YAG-444N-4AH	1064 nm Quadrant PIN	11.5	100	9	12	30	200	0.6	0.5	0.1	Custom
YAG-555-4AH	1064 nm Quadrant PIN	14.1	156	12	12	50	200	0.6	0.5	0.2	Custom
YAG-555N-4AH	1064 nm Quadrant PIN	14.1	156	12	12	50	50	0.6	0.5	0.1	Custom
C30665GH-4A	1550 nm Quadrant PIN	3	7	115	14	2		0.8	1.05	0.08	TO-5

\* Responsivity is measured at 900 and 1064 nm for 1064 nm quadrant PINs, and 1064 and 1550 nm for 1550 nm qua

\*\* The YAG series of quadrant PIN photodiodes are available with built-in heater package, upon request.



nordics@amstechnologies.com  
azpect.amstechnologies.com

Contact us

