


Blue-Enhanced Silicon Photodiodes

For Industrial & Commercial Applications

SILICON PN PHOTODIODES ■

Silicon Photodiodes – VTB Series
Ultra High Dark Resistance

Silicon Photodiodes – VTB Series – Ultra High Dark Resistance

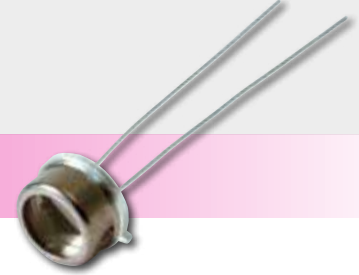

Applications

- Ambient light sensing
- UV and blue light sensing
- Flame monitoring
- Light meters
- Photometry

Features and Benefits

- UV to IR spectral range
- Integral IR rejection filters available
- Response @ 365 nm, 0.14A/W typical
- Response @ 220 nm, 0.06A/W typical with UV window
- 1 to 2 % linearity over 7 to 9 decades
- Very low dark current
- High shunt resistance
- RoHS compliant

Distributor



AZPECT
part of
amSTECHNOLOGIES
where technologies meet solutions

nordics@amstechnologies.com
azpect.amstechnologies.com

Contact us 

Product Description

This series of P on N silicon planar photodiodes have been designed for optimum response through the visible part of the spectrum. Units with UV transmitting windows also exhibit excellent response in the UV. "B" series units have a built-in infrared rejection filter for applications requiring a response approximating the human eye. Photodiodes made with the VTB process are primarily intended to be used in photovoltaic mode but may be used with a small reverse bias. All photodiodes in this series exhibit very high shunt resistance. This characteristic leads to very low offsets when used in high gain transimpedance op-amps circuits.

VTB1012



Small area planar silicon photodiode in flat window TO-46 package

VTB6061




Large area planar silicon photodiode in a flat window TO-8 package

VTB4051



Planar silicon photodiode mounted on a ceramic substrate and coated with a layer of clear epoxy

VTB8341



Planar silicon photodiode mounted on a ceramic substrate and coated with a layer of clear epoxy

Product Table

Silicon Photodiodes – VTB Series – Ultra High Dark Resistance

Symbol Unit	Package	Active Area (mm ²)	Short Circuit Current @ 100 fc, 2850 K		Dark Current max I _D VR = 2V (nA)	Typical Junction Capacitance @ VR = 0V (nF)	Typical Radiometric Sensitivity @ λ _{peak} (AW)	Spectral Range (nm)	Typical Peak Wavelength (nm)	Typical Noise
			min I _{SC} μA	max I _{SC} μA						Equivalent Power W/√Hz
VTB100AH	Flat sidelooper	7.1	50	0.5 @ VR = 10V	0.1	0.55	320-1100	925	9 X 10 ⁻¹⁴	
VTB1012H	TO-46	1.6	8	0.1	0.31	0.5	320-1100	920	3 X 10 ⁻¹⁴	
VTB1012BH	TO-46	1.6	0.8	0.1	0.31	0.29	330-720	580	5.3 X 10 ⁻¹⁴	
VTB1013H	TO-46	1.6	8	0.02	0.31	0.5	320-1100	920	5.9 X 10 ⁻¹⁵	
VTB1013BH	TO-46	1.6	0.8	0.02	0.31	0.29	330-720	580	1.1 X 10 ⁻¹⁴	
VTB1112H	TO-46 lensed	1.6	30	0.1	0.31	0.5	320-1100	920	3 X 10 ⁻¹⁴	
VTB1112BH	TO-46 lensed	1.6	3	0.1	0.31	0.29	330-720	580	5.3 X 10 ⁻¹⁴	
VTB1113H	TO-46 lensed	1.6	30	0.02	0.31	0.5	320-1100	920	5.9 X 10 ⁻¹⁵	
VTB1113BH	TO-46 lensed	1.6	3	0.02	0.31	0.29	330-720	580	1.1 X 10 ⁻¹⁴	
VTB4051H	Ceramic	14.8	100	0.25	3	0.5	320-1100	920	2.1 X 10 ⁻¹⁴	
VTB5051H	TO-5	14.8	85	0.25	3	0.5	320-1100	920	2.1 X 10 ⁻¹⁴	
VTB5051BH	TO-5	14.8	8	0.25	3	0.29	330-720	580	3.7 X 10 ⁻¹⁴	
VTB5051JH	TO-5 with 3 pins	14.8	85	0.25	3	0.5	320-1100	920	2.1 X 10 ⁻¹⁴	
VTB5051UVH	TO-5	14.8	85	0.25	3	0.1 @ 365 nm	200-1100	920	2.1 X 10 ⁻¹⁴	
VTB5051UVJH	TO-5 with 3 pins	14.8	85	0.25	3	0.1 @ 365 nm	200-1100	920	2.1 X 10 ⁻¹⁴	
VTB6061H	TO-8	37.7	260	2	8	0.5	320-1100	920	5.7 X 10 ⁻¹⁴	
VTB6061BH	TO-8	37.7	26	2	8	0.29	330-720	580	1 X 10 ⁻¹³	
VTB6061CIEH	TO-8	37.7	26	2	8	0.5	460-675	555	1.3 X 10 ⁻¹³	
VTB6061JH	TO-8 with 3 pins	37.7	260	2	8	0.5	320-1100	920	5.7 X 10 ⁻¹⁴	
VTB6061UVH	TO-8	37.7	260	2	8	0.1 @ 365 nm	200-1100	920	5.7 X 10 ⁻¹⁴	
VTB6061UVJH	TO-8 with 3 pins	37.7	260	2	8	0.1 @ 365 nm	200-1100	920	5.7 X 10 ⁻¹⁴	
VTB8341H	Ceramic	5.16	35	0.1	1	0.5	320-1100	920	2.4 X 10 ⁻¹⁴	
VTB8440H	8 mm Ceramic	5.16	35	2	1	0.5	320-1100	920	5.9 X 10 ⁻¹⁴	
VTB8440BH	8 mm Ceramic	5.16	4	2	1	0.29	330-720	580	1.1 X 10 ⁻¹³	
VTB8441H	8 mm Ceramic	5.16	35	0.1	1	0.5	320-1100	920	1.3 X 10 ⁻¹⁴	
VTB8441BH	8 mm Ceramic	5.16	4	0.1	1	0.29	330-720	580	2.4 X 10 ⁻¹⁴	

Distributor



AZPECT
part of
amSTECHNOLOGIES
where technologies meet solutions

nordics@amstechnologies.com
azpect.amstechnologies.com

Contact us 

Figure 1

Package Drawing – VTB Series – Flat Sidelooper Package

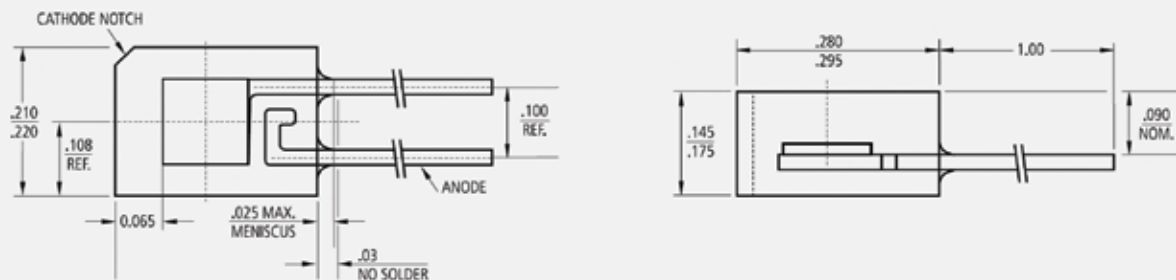


Figure 2

Package Drawing – VTB Series – TO-46 Package

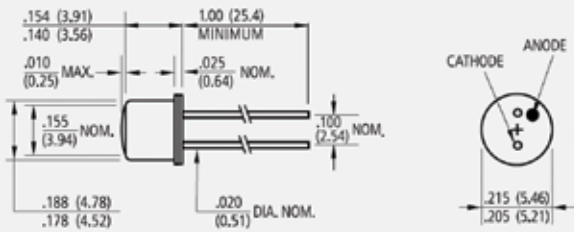


Figure 3

Package Drawing – VTB Series – TO-5 Package

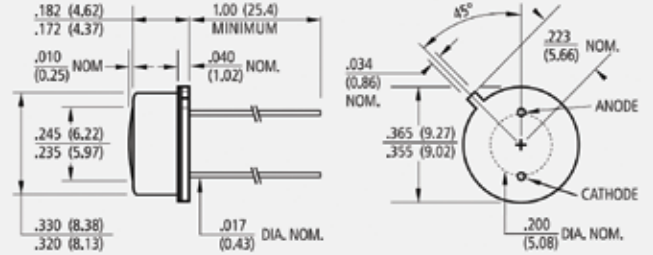


Figure 4

Package Drawing – VTB Series - TO-46 Lensed

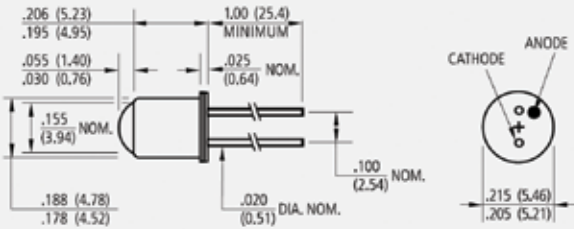


Figure 5

Package Drawing – VTB Series - Ceramic Package

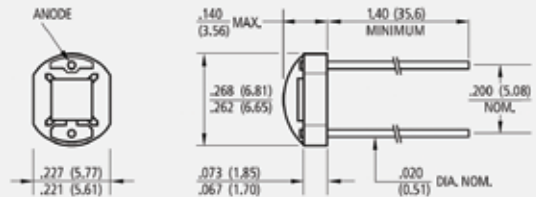


Figure 6

Package Drawing – VTB Series- 8mm Ceramic Package


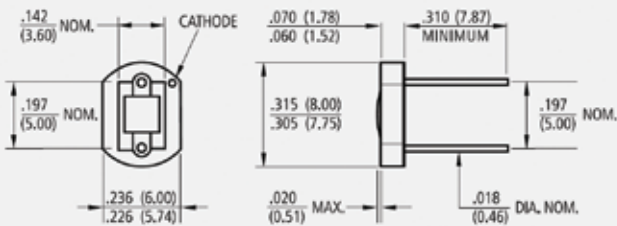



Figure 7

Package Drawing – VTB Series – TO-8 Package

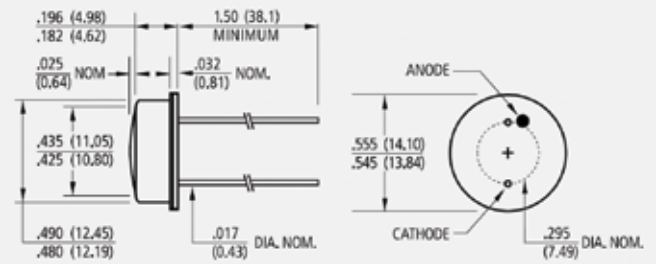


Graph 1

Absolute Spectral Response

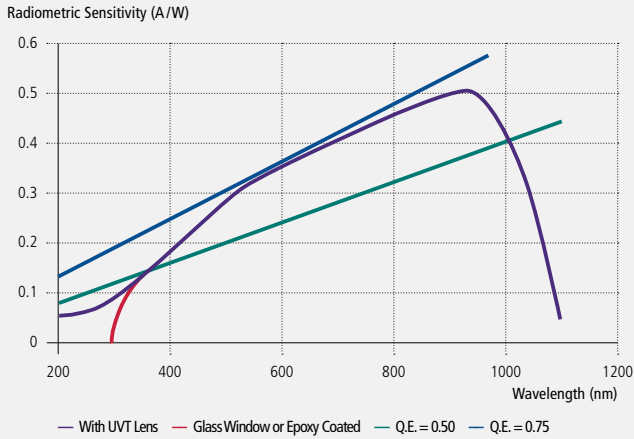


Graph 2

Absolute Spectral Response "B" Series (Filtered)

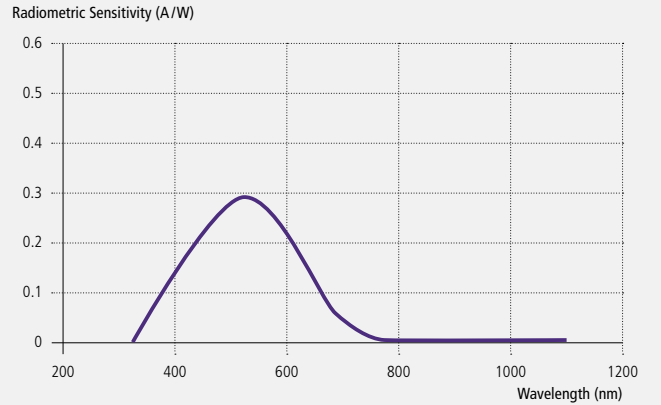


Graph 3

Rel. Current or Resistance vs. Temperature (Referred to 25°C)

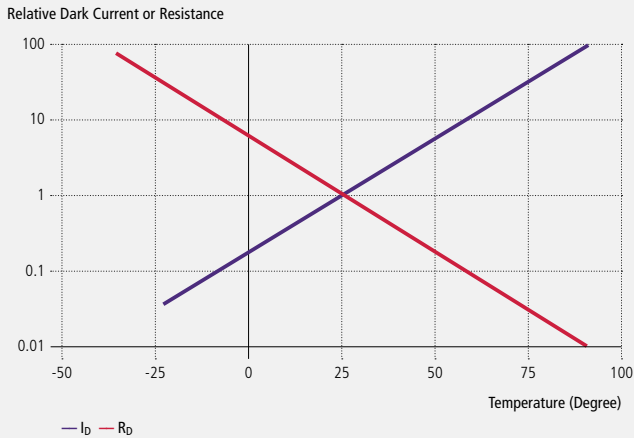


Graph 4

Relative Junction Capacitance vs. Voltage (Referred to Zero Bias)

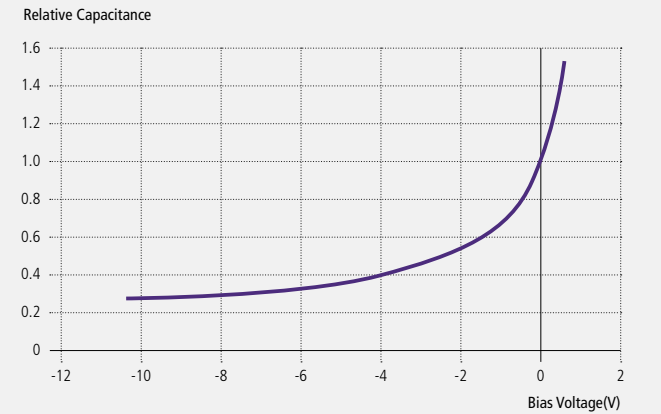

Graph 5

Relative Short Circuit Current vs. Illumination

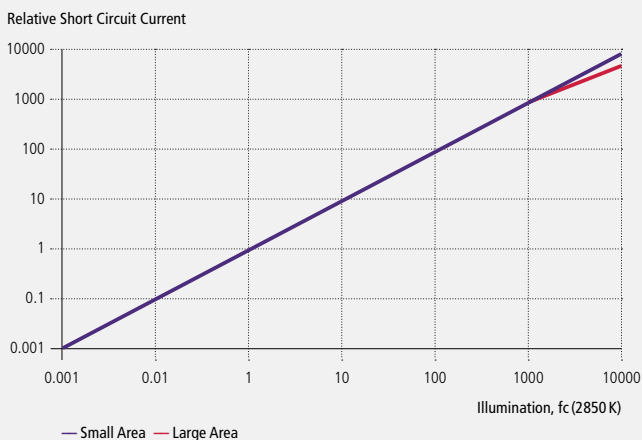

Graph 6

Rise/Fall Times – Non Standard

