


Ox-SAC-08

Diamond Angled Cleaver



- Angled cleaving for field-assembled connectors
- Highly repeatable cleave angle
- Rugged construction for field use
- Detachable fiber holder for angled mechanical splice
- Diamond blade for long life and accurate cleaves

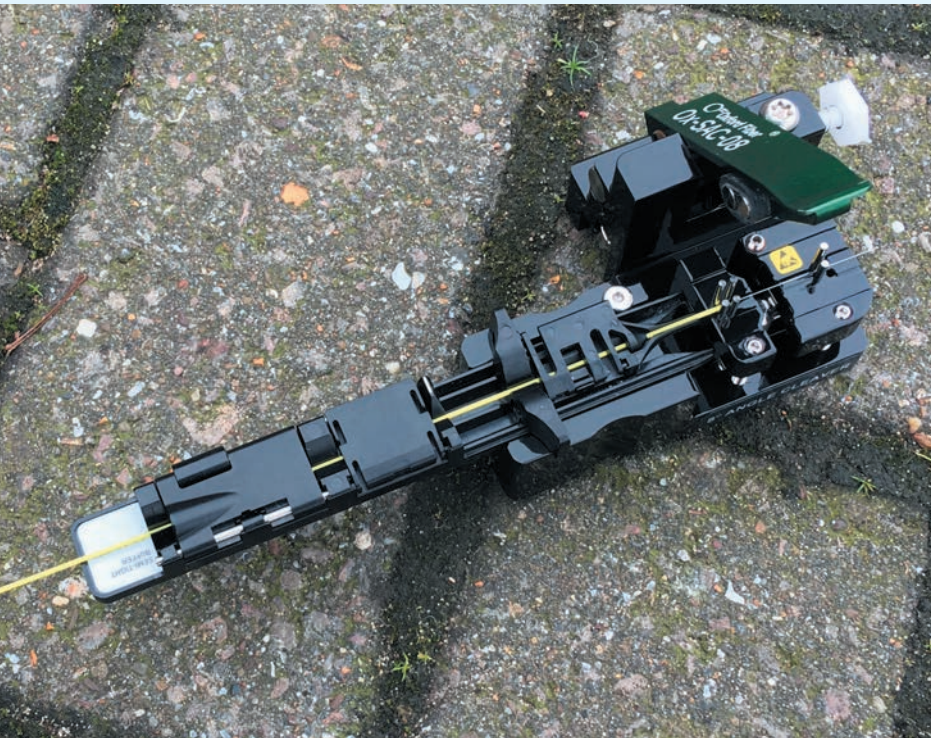

Distributor



amSTECHNOLOGIES

where technologies meet solutions

info@amstechnologies.com
www.amstechnologies-webshop.com

Contact us 

Features

- Stapler action
- Rugged construction for field use
- 10 position replaceable diamond blade for extended life
- Benchtop operation
- Easy fiber loading using detachable fiber holder
- Compatible with angled mechanical splice
- Offcut bin, tool latch & case

Specifications

| | |
|-------------------------|--|
| Fiber Diameter | 125µm SMF or PM fiber |
| Buffer Diameter | 250-900µm |
| Angle over Core | 8° (+1- 2°) |
| Blade Life | > 20,000 estimated |
| Cleave Length | > 8mm (for 900µm); > 2mm (for 250µm) |
| Dimensions (Max) | 67mm x 40mm x 79mm (2.7" x 1.6" x 3.1") |
| Weight | 170g (0.4lbs) |

Ox-SAC-08

Diamond Angled Cleaver

Distributor



amSTECHNOLOGIES
where technologies meet solutions

info@amstechnologies.com
www.amstechnologies-webshop.com

Contact us

End Angle
(degrees)

06
08
10

Fiber Diameter (µm)

125

Buffer
Diameter (µm)

250
900

Cleave
Length (mm)

>02 for 250µm buffer
>08 for 900µm buffer

Full Description


Ox-SAC-*/*/125/YYY/Z

Example

Ox-SAC-08/125/900/08

If you require a cleaver for any other fiber type, or a custom cleaver, please contact Oxford Fiber or your local agent.

This specification may be changed without notice due to technical advances

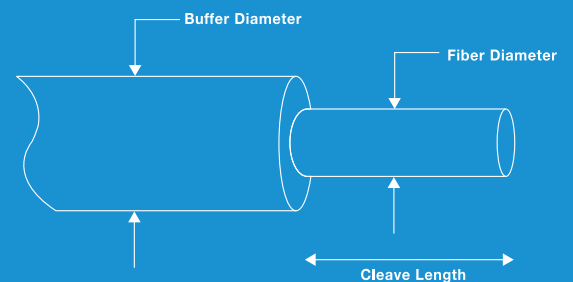

OXFORD FIBER[®]