

Piezo Tunable Etalon xxxxnm, FSR xxxGHz, Finesse x

REVISIONS					
REV	REVISED PER	Date	Approved		
Α	first release	'2005 March 16	JHH		

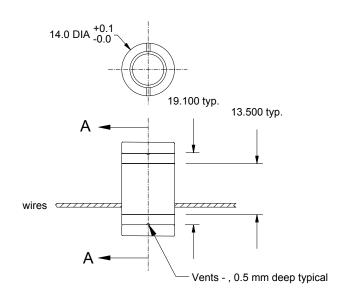

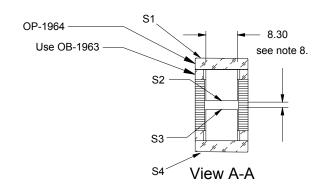


Notes


- 1. Operating wavelength = XXXXnm
- 2. Finesse = X
- 3. FSR = XXXGHz
- 4. Coating S1 AR, R<0.5% at 1550nm
- 5. Coating S2 XX% ± 1% at XXXnm
- 6. Coating S3 XX% ± 1% at XXXXnm
- 7. Coating S4- AR, R<0.5% at 1550nm
- 8. Gap = XXXXmm at 0 volts

LightMachinery OP-1986 - X				
dimensions mm	material			
Tolerances (unless otherwise noted) X ±0.5 A ±1°	Scale 1:1			
X.X ±0.1 A.A ±0.1° X.XX ±0.025 Drawing Template QT-730-002-C	Third angle projection			

This design and print is the property of LightMachinery, Inc., and shall not be used as the basis for the manufacture or sale of apparatus without the written permission of LightMachinery, Inc.

REVISIONS				
REV	REVISED PER	Date	Approved	
Α	first release	2015 Feb 4	IJM	





Notes:

- 1. Aluminum barrel, Delrin cap.
- 2. Piezo is clamped at one end only, wires go at the Delrin end.
- 3. M2 screws secure the cap.



where technologies meet solutions

info@amstechnologies.com www.amstechnologies-webshop.com



Piezo etalon mount LightMachinery OP-7670

dimensions mm	material:		
Tolerances (unless otherwise noted) X ±0.5 A ±1°	Scale 1:1		
X.X ±0.1 A.A ±0.1° X.XX ±0.025 Drawing Template QT-730-002-E	Third angle projection		

This design and print is the property of LightMachinery, Inc., and shall not be used as the basis for the manufacture or sale of apparatus without the written permission of LightMachinery, Inc.