

# Miniature CCD Spectrometers with High Resolution and High Stability

(Part Numbers: HRS-UV1-xxx, HRS-VIS-xxx, HRS-NIR-xxx, HRS-IR1-xxx and HRS-BD1-xxx)

## FEATURES

- High spectral resolution
- Ultra compact
- High long term and temperature stability
- Interchangeable input ports with various slits
- USB2.0 interface
- High speed up to 138 scans/s
- No external power required
- Trigger input
- Full-featured SDK
- GPIOs for interfacing with other equipment
- Linux driver available

## APPLICATIONS

- Lab research
- Process control
- Environment monitoring

## PRODUCT DESCRIPTION

Compact CCD spectrometers are widely used in process control, environment monitoring, and scientific research applications. Mightex HRS series compact CCD spectrometers features a high-resolution 100mm Czerny-Turner optical platform coupled with a Toshiba 3648-element CCD array. The optimized optical path yields both high spectral resolution and high light collection efficiency. Wavelength and amplitude stability is often a critical requirement for many spectrometer applications. All optical components in the HRS series spectrometers are mounted directly on a single-piece base without using screws. A box enclosure structure further increases stiffness of the base. The proprietary mounting method ensures high stability over time and temperature.

The spectrometer takes input through a SMA connector port. Usually a fiber patch cord is used to transmit light into the spectrometer. However it's also possible to send the input light directly into the spectrometer through the input slit. Input ports are interchangeable so that ports with different slit size (or without slit) can be used. Note that wavelength calibration is necessary after changing the input port.

A 16-bit DAC is used to convert the analog signal from the CCD array into a digital stream. The electronics hardware also includes trigger input and four programmable digital I/Os for interfacing with other equipment such as a light source. The spectrometer is controlled through a USB2.0 interface which also supplies all the electric power needed to operate the spectrometer.

Standard software package includes a full-featured PC software as well as a software development kit (SDK) for further software development.

## PERFORMANCE SPECIFICATIONS

| Parameters             | Specification                      |             |             |             |                           | Unit     |
|------------------------|------------------------------------|-------------|-------------|-------------|---------------------------|----------|
|                        | HRS-UV1-025                        | HRS-VIS-025 | HRS-NIR-025 | HRS-IR1-025 | HRS-BD1-025               |          |
| Model                  | HRS-UV1-025                        | HRS-VIS-025 | HRS-NIR-025 | HRS-IR1-025 | HRS-BD1-025               | -        |
| Optical Platform       | f/4, Czerny-Turner                 |             |             |             |                           | -        |
| Focal Length           | 100                                |             |             |             |                           | mm       |
| Wavelength Range       | 200 ~ 400                          | 390 ~ 780   | 600 ~ 1,000 | 700 ~ 870   | 300 ~ 1,050               | nm       |
| Resolution*            | 0.25                               | 0.4         | 0.5         | 0.2         | 0.9                       | nm       |
| Order Sorting Filter   | Longpass                           | Longpass    | Longpass    | Longpass    | Spatially Variable Filter | -        |
| Entrance Slit          | 5, 10, 25, 50, 100, 200 or no slit |             |             |             |                           | μm       |
| Input Fiber Connector  | SMA 905                            |             |             |             |                           | -        |
| Input Fiber NA         | 0.22                               |             |             |             |                           | -        |
| Detector               | Toshiba TCD1304AP Linear CCD Array |             |             |             |                           | -        |
| Pixel Number           | 3648                               |             |             |             |                           | -        |
| Pixel Size             | 8x200                              |             |             |             |                           | μm       |
| Pixel Well Depth       | 100,000                            |             |             |             |                           | electron |
| Signal-to-noise Ratio  | 1000:1(at full scale)              |             |             |             |                           | -        |
| A/D Resolution         | 16                                 |             |             |             |                           | bit      |
| Integration Time       | 0.1 to 6,500                       |             |             |             |                           | ms       |
| Frame Rate             | up to 138                          |             |             |             |                           | fps      |
| GPIO                   | 4 programmable digital I/Os        |             |             |             |                           | -        |
| Trigger Input          | Yes                                |             |             |             |                           | -        |
| PC Interface           | USB 2.0                            |             |             |             |                           | -        |
| Trigger/GPIO Interface | DIN8                               |             |             |             |                           | -        |
| PC Operating System    | Windows 2000/XP/Vista/7/8          |             |             |             |                           | -        |
| Power Consumption      | 300(at 5V)                         |             |             |             |                           | mA       |
| Dimensions             | 138 x 108 x 37                     |             |             |             |                           | mm       |
| Weight                 | 510                                |             |             |             |                           | g        |

\* With a 25μm slit.

### Spectral Resolution (FWHM, nm) vs. Slit Width (μm)


| Slit Width(μm) | 5    | 10   | 25   | 50   | 100  | 200  |
|----------------|------|------|------|------|------|------|
| HRS-UV1-xxx    | 0.15 | 0.20 | 0.25 | 0.45 | 0.85 | 1.65 |
| HRS-VIS-xxx    | 0.25 | 0.30 | 0.40 | 0.80 | 2.00 | 4.80 |
| HRS-NIR-xxx    | 0.25 | 0.30 | 0.50 | 0.90 | 2.10 | 4.90 |
| HRS-IR1-xxx    | 0.12 | 0.15 | 0.20 | 0.38 | 0.90 | 2.10 |
| HRS-BD1-xxx    | 0.50 | 0.60 | 0.90 | 1.70 | 4.10 | 9.70 |




# Miniature CCD Spectrometers with High Resolution and High Stability

(Part Numbers: HRS-UV1-xxx, HRS-VIS-xxx, HRS-NIR-xxx, HRS-IR1-xxx and HRS-BD1-xxx)

## EXAMPLE OF GRAPHICAL USER INTERFACE

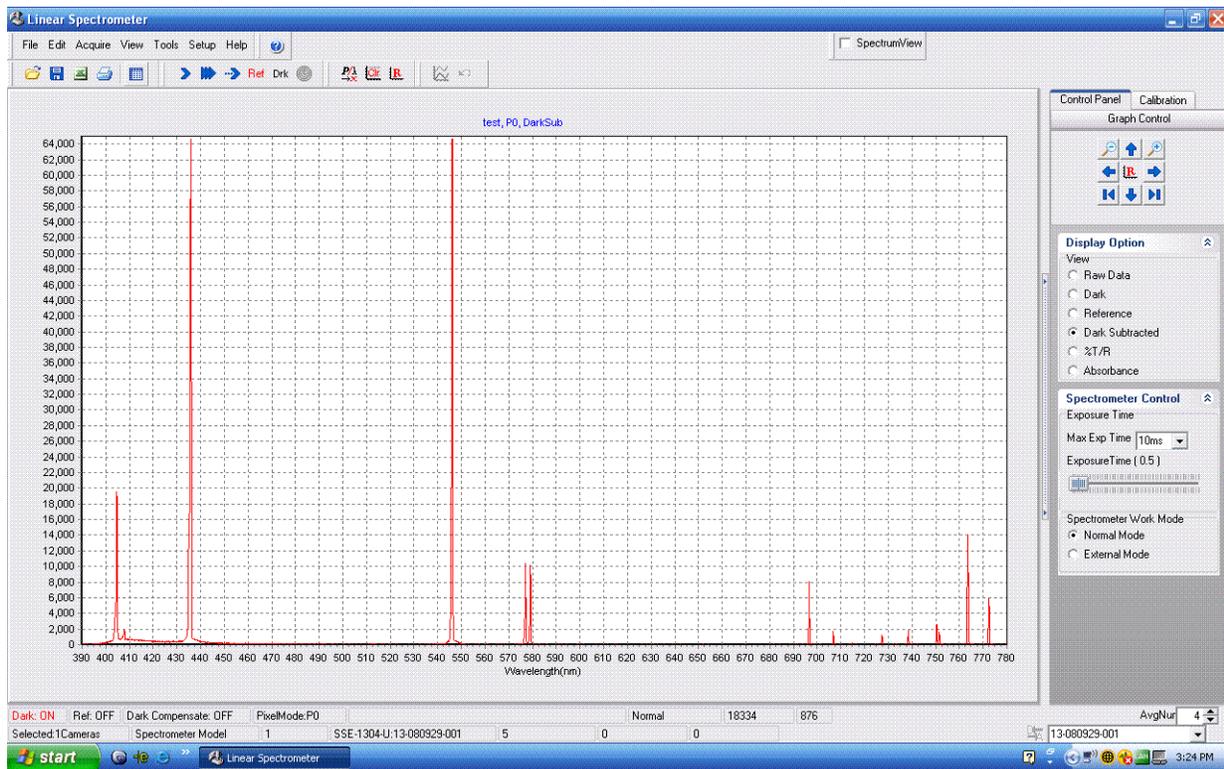

## PART NUMBER AND ORDERING INFORMATION



Wavelength Range:                      Slit Size (µm)

UV1: 200-400 nm

VIS: 390-780 nm

NIR: 600-1000 nm

IR1: 700-870 nm

BD1: 300-1050 nm

For example, HRS-VIS-010 is a spectrometer with a wavelength range of 390-780nm and a 10 µm slit size.

With a world-class OEM design team, Mightex offers a broad range of customized solutions in order to meet individual customer's unique requirements. Please call 1-416-840 4991 or email sales@mightex.com for details.

Distributor



**amstechnologies**

where technologies meet solutions

info@amstechnologies.com  
www.amstechnologies-webshop.com

**Contact us**