
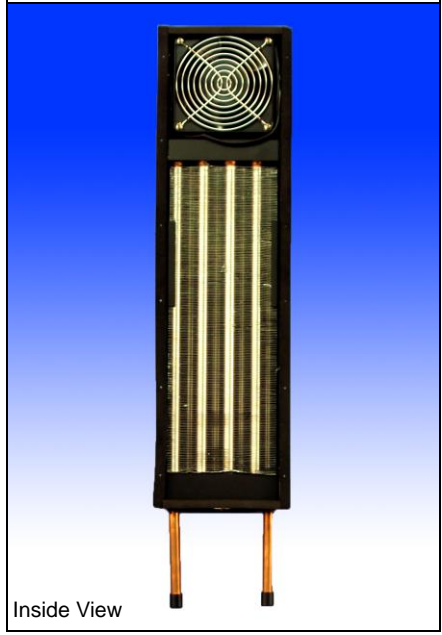
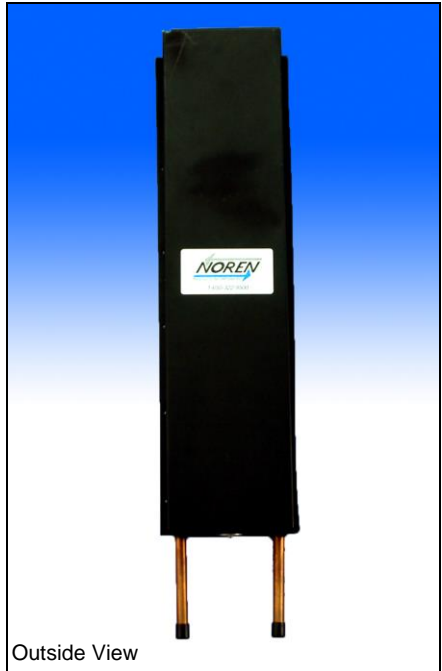


CC2060 TYPE 12 COMPACT CABINET COOLER AIR-TO-WATER FLUSH-MOUNT MODEL

Model	Weight	Rating @ 40°C ΔT BTU / hr	Amps Current Draw at 115 volts AC	Fan Size	Dimensions-Inches (H x W x D)
CC2060	9 lbs	3,350	0.2	1 x 4"	22-1/2 x 6-1/4 x 4

Efficiency: 24.5 Watts / °C ΔT based on average internal cabinet temperature.

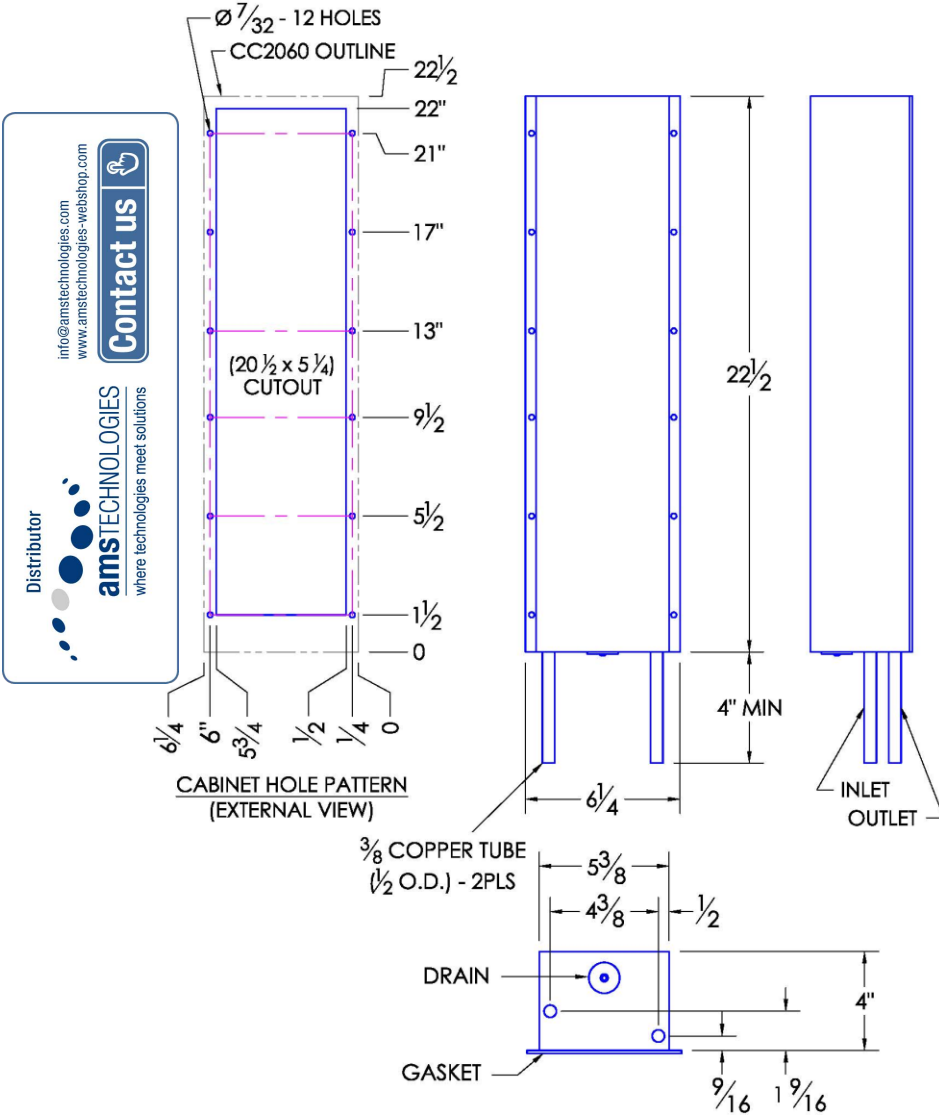

- ### SPECIFICATIONS
- UL Listed for TYPE 12 environments.
 - CC2060 Rated cooling: 980 Watts mounted to an uninsulated 24" x 24" x 16" Cabinet with 1 GPM of water at 20°C, 40°C ambient air and 60°C cabinet air temperature.
 - Designed for surface mounting on the outside of cabinet.
 - Housing is aluminum (color is black).
 - External water inlet and outlet connections.
 - Equipped with mounting gasket to maintain air tight seal.
 - Available with AC (115 & 230V) and DC (12, 24, & 48V) fans. DC version includes junction box, consult website.
 - Vertical mounting only.
 - Coolant water pressure: Pressure tested to 100 psi. Safe working pressure is 60 psi.
 - Recommended coolant flow rate (gallons per minute): 1 GPM
 - For design, quote, and sizing assistance: call (866) 936 - 6736.**





UL US LISTED
 Proudly made in USA
 ISO 9001:2008
 FM 554949


 1010 O'Brien Drive
 Menlo Park, CA 94025
 650.322.9500
 norenproducts.com

CC2060 TYPE 12

CCS-PBD-7.2.2-883342-B