



LLF50 & LLF60 SERIES

VERTICAL FAST LIFT FLOAT SWITCHES



The LLF series of vertical float switches have been developed for applications where very low liquid levels need to be detected.

The LLF uses a large diameter Buna float to allow operation in SG as low as 0.45. The switch is capable of operating in as low as 6mm of water.

Two standard lengths are available with either make on rise or make on fall switching action.

Typical uses include drip tanks, hatch alarms and other applications where highly sensitive liquid detection is required.

Features

- Operates in 10mm minimum liquid
- 50mm & 200mm length versions
- Vertical mount M12 or M16
- Will operate in low SG (0.45)

SPECIFICATIONS

Technical

		LLF59	LLF69
Material	Stem	Nylon	PPS
	Float	Buna	Buna
Temp. Range	°C	-20/+75	
	°F	-4/+167	
Min. Fluid SG		0.45	
Must Close Level (SG=1)		10mm	
Must Open Level (SG=1)		12mm	

* Temperature ranges refer to wetted parts.

Electrical

Contact Form		N/O (N/C)
Switching Power Max	VA	25
Switching Voltage AC Max	V	240
Switching Voltage DC Max	V	120
Switching Current Max	A	0.6

All ratings are for resistive load only.


STANDARD PARTS

	Material	Switch Action	Leadouts	Gasket
LLF59Y100JC	Nylon/Buna	Make on rise	100cm 2 core PVC 7/0.2	Nitrile
LLF59Y100JC004	Nylon/Buna	Make on fall	100cm 2 core PVC 7/0.2	Nitrile
LLF69A198	PPS/Buna	Make on rise	100cm 2 core PVC 7/0.2	Nitrile
LLF69B198	PPS/Buna	Make on fall	100cm 2 core PVC 7/0.2	Nitrile

Custom versions can be made for particular applications. Please contact Sensata with your requirements.

DIMENSIONS

All dimensions are in millimeters.

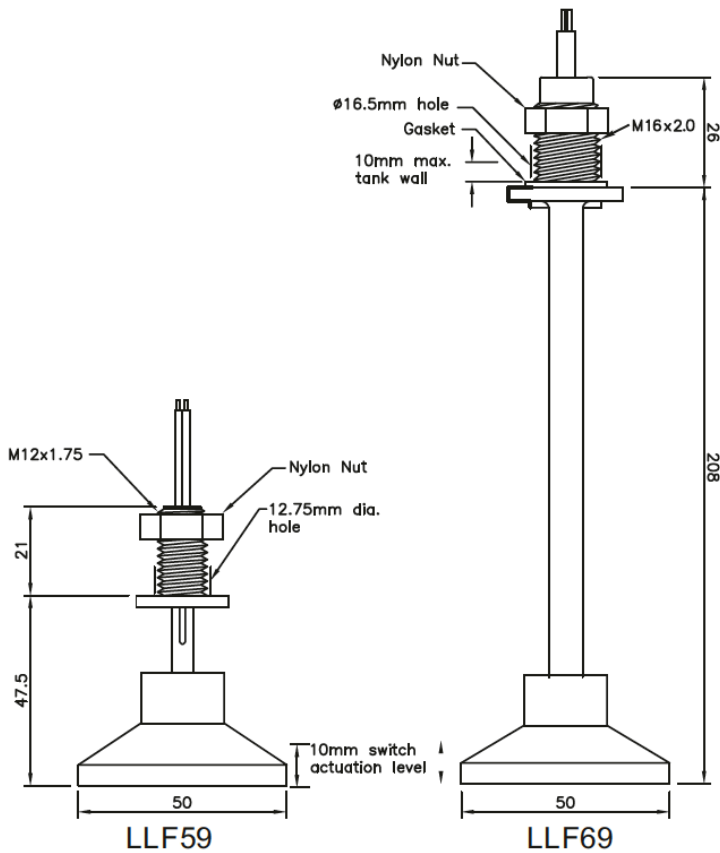



info@amstechnologies.com
www.amstechnologies.com
shop.amstechnologies.com

Get expert guidance now!

Datasheets provided by Sensata Technologies, Inc., its subsidiaries and/or affiliates ("Sensata") are solely intended to assist third parties ("Buyers") who are developing systems that incorporate Sensata products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, valuation, and judgment in designing Buyer's systems and products. Sensata datasheets have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular datasheet. Sensata may make corrections, enhancements, improvements, and other changes to its datasheets or components without notice. Buyers are authorized to use Sensata datasheets with the Sensata component(s) identified in each particular datasheet. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATASHEETS ARE PROVIDED "AS IS". SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATASHEETS OR USE OF THE DATASHEETS, EXPRESS, IMPLIED, OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATASHEETS OR USE THEREOF.

All products are sold subject to Sensata's terms and conditions of sale supplied at www.sensata.com. SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS' PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY, AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS- RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

Mailing Address: Sensata Technologies, Inc., 529 Pleasant Street, Attleboro, MA 02703, USA

CONTACT US

Sensata Technologies
 Jan Tinbergenstraat 80
 7559 SP Hengelo
 The Netherlands
 1-508-236-3800
 +44 (0)1202 897969
cynergy3.enquiries@sensata.com