


# CC600F TYPE 12 COMPACT CABINET COOLER AIR-TO-AIR FLUSH-MOUNT MODEL

Model	Weight	Rating @ 20°C ΔT BTU / hr	Amps Current Draw at 115 volts AC	Fan Size 2 x 6"	Dimensions-Inches (H x W x D)
CC600F	14 lbs	3,300	0.6	2 x 6"	30 x 8-3/4 x 4

Efficiency: 49.4 Watts / °C ΔT based on average internal cabinet temperature.

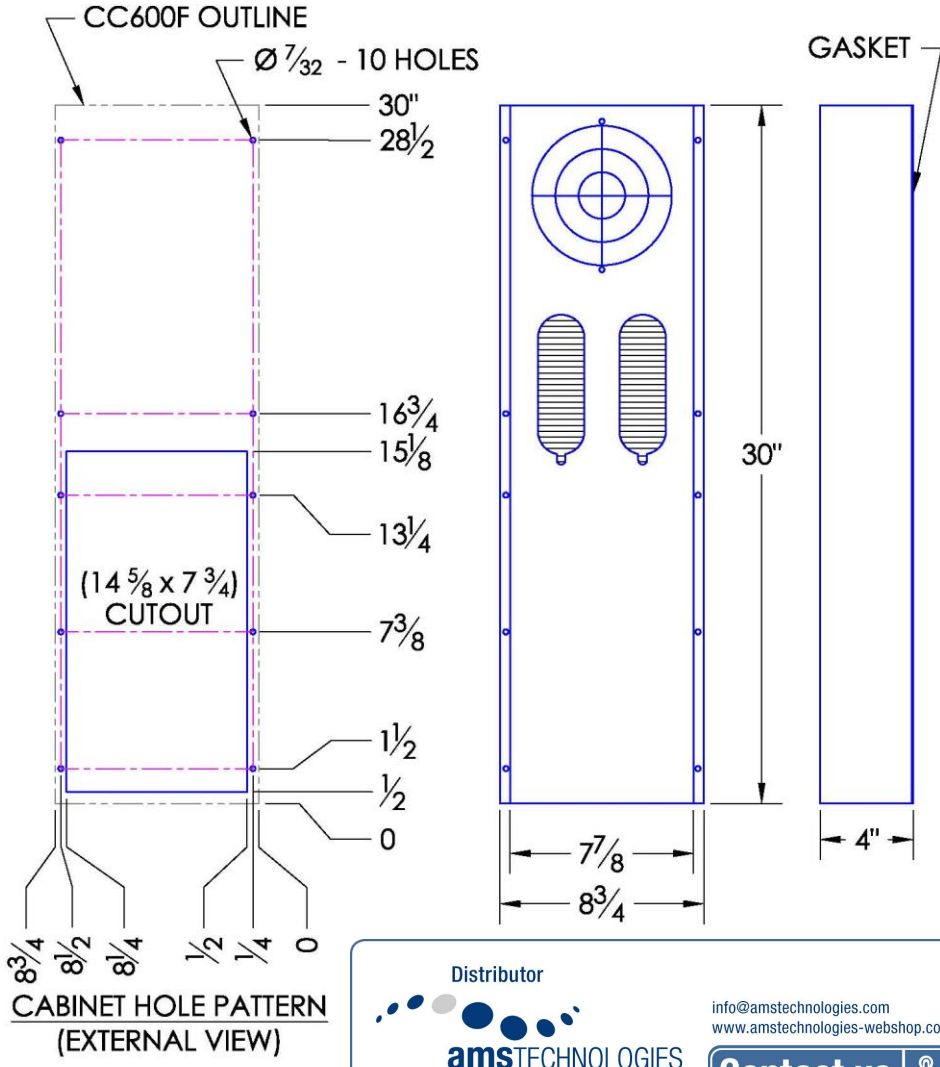


Distributor

info@amstechnologies.com  
www.amstechnologies-webshop.com

**Contact us**

where technologies meet solutions

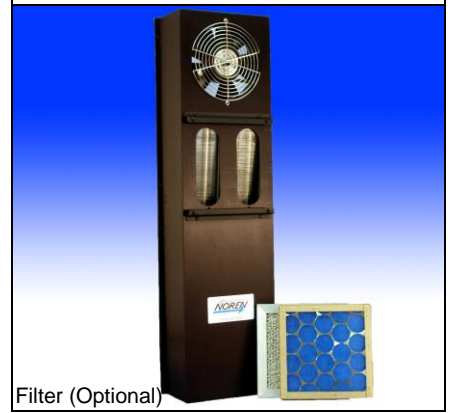

- SPECIFICATIONS**
- UL Listed for TYPE 12 environments.
  - CC600F Rated cooling: 988 Watts at 20°C ΔT (49.4W/°C, mounted to an uninsulated 72" X 36" X 24" Cabinet)
  - Designed for surface mounting on outside of cabinet.
  - Housing is aluminum (color is black). Stainless steel is available.
  - Equipped with mounting gasket to maintain air tight seal.
  - Available with AC (115 & 230V) and DC (12, 24, & 48) fans. DC version includes junction box, consult website.
  - Vertical and horizontal mounting ok.
  - Optional: inlet air-filter kit available upon request.
  - 9. For design, quote, and sizing assistance: call (866) 936-6736.**

**UL** US LISTED

UL File #SA9567 Proudly made in USA

ISO 9001:2008 FM 554949

**NOREN** 1010 O'Brien Drive  
Menlo Park, CA 94025  
650.322.9500  
norenproducts.com

**CC600F TYPE 12**

CCS-PBD-7.2.2-883349-B

Subject to change without notice.