
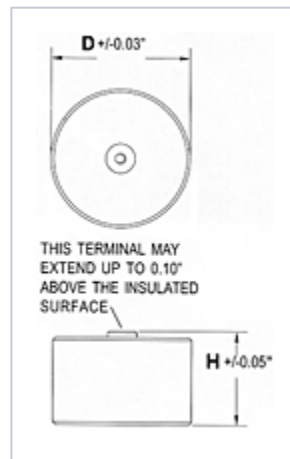


## EPSL Series Ceramic Capacitors

- Designed For High Voltage DC-Blocking
- High Capacitance Values in Small Size
- Rugged & Epoxy Encapsulated
- High-Torque Terminals Available
- Class II X5U Dielectric
- One Year Warranty

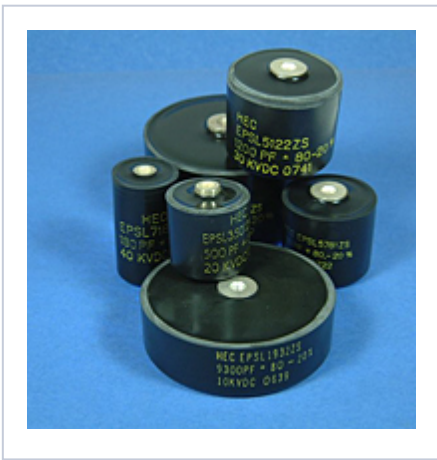

<u>Part Number</u>	<u>CAP</u>	<u>V<sub>MAX</sub>(DC)</u>	<u>Physical Depth (D)</u>	<u>Physical Height (H)</u>	<u>Terminal H Available</u>
<u>EP<sub>SLU</sub>112ZS</u>	1100 pF	6 kV	0.83 in	0.69 in	No
<u>EP<sub>SLU</sub>202ZS</u>	2000 pF	6 kV	1.00 in	0.69 in	No
<u>EP<sub>SLU</sub>342ZS</u>	3400 pF	6 kV	1.25 in	0.69 in	No
<u>EP<sub>SLU</sub>542ZS</u>	5400 pF	6 kV	1.50 in	0.69 in	No
<u>EP<sub>SLU</sub>802ZH</u>	8000 pF	6 kV	1.75 in	0.69 in	Yes
<u>EP<sub>SLU</sub>113ZS</u>	11000 pF	6 kV	2.08 in	0.69 in	Yes
<u>EP<sub>SLU</sub>143ZH</u>	14000 pF	6 kV	2.25 in	0.69 in	Yes
<u>EP<sub>SLU</sub>163ZS</u>	16000 pF	6 kV	2.37 in	0.69 in	Yes

<u>Part Number</u>	<u>CAP</u>	<u>V<sub>MAX</sub> (DC)</u>	<u>Physical Depth (D)</u>	<u>Physical Height (H)</u>	<u>Terminal H Available</u>
<u>EPSL1681ZS</u>	800 pF	10 kV	0.83 in	0.81 in	No
<u>EPSL1122ZS</u>	1200 pF	10 kV	1.00 in	0.81 in	No
<u>EPSL1202ZS</u>	2000 pF	10 kV	1.25 in	0.81 in	No
<u>EPSL1322ZS</u>	3200 pF	10 kV	1.50 in	0.81 in	No
<u>EPSL1472ZS</u>	4700 pF	10 kV	1.75 in	0.81 in	Yes
<u>EPSL1652ZS</u>	6500 pF	10 kV	2.08 in	0.81 in	Yes
<u>EPSL1832ZS</u>	8300 pF	10 kV	2.25 in	0.81 in	Yes
<u>EPSL1932ZS</u>	9300 pF	10 kV	2.37 in	0.81 in	Yes
<u>EPSL2471ZS</u>	470 pF	15 kV	0.83 in	0.95 in	No
<u>EPSL2801ZS</u>	800 pF	15 kV	1.00 in	0.95 in	No
<u>ESPL2132ZS</u>	1300 pF	15 kV	1.25 in	0.95 in	No
<u>ESPL2222ZS</u>	2200 pF	15 kV	1.50 in	0.95 in	No
<u>EPSL2322ZS</u>	3200 pF	15 kV	1.75 in	0.95 in	Yes
<u>EPSL2462ZS</u>	4600 pF	15 kV	2.08 in	0.95 in	Yes
<u>EPSL2582ZS</u>	5800 pF	15 kV	2.25 in	0.95 in	Yes
<u>EPSL2652ZS</u>	6500 pF	15 kV	2.37 in	0.95 in	Yes
<u>ESPL3351ZS</u>	350 pF	20 kV	0.83 in	1.13 in	No