

EXTENSION TUBES FOR VERTICAL FLOAT SWITCHES



A range of extension tubes available in Polypropylene or Stainless Steel (316L grade), which extend the reach of the various vertical float switches.

The Polypropylene tubes, with either M12 or M16 threads, are intended for use with our plastic types of float switches and are available in 250mm, 500mm and 750mm lengths.

Stainless steel extension tubes, with either 1/8BSP (G1/8), 3/8BSP (G3/8) or M16 threads, are intended for use with our stainless steel float switches and are available in lengths from 250mm to 1000mm.

Features


- Extends the reach of vertical switches
- Polypropylene extensions with M12 or M16 thread
- SS 316L extensions with G1/8, G3/8 or M16 thread

STANDARD PARTS


Cynergy3 Part Material	Thread	Extension length	Gasket
EXT025M12PP Polypropylene	M12x1.75	250mm	Nitrile
EXT050M12PP Polypropylene	M12x1.75	500mm	Nitrile
EXT075M12PP Polypropylene	M12x1.75	750mm	Nitrile
EXT025M16PP Polypropylene	M16x2	250mm	Nitrile
EXT050M16PP Polypropylene	M16x2	500mm	Nitrile
EXT075M16PP Polypropylene	M16x2	750mm	Nitrile
EXT025G18SS SS 316L	G1/8	250mm	Nitrile
EXT050G18SS SS 316L	G1/8	500mm	Nitrile
EXT075G18SS SS 316L	G1/8	750mm	Nitrile
EXT100G18SS SS316L	G1/8	1000mm	Nitrile
EXT025G38SS SS 316L	G3/8	250mm	Nitrile
EXT050G38SS SS 316L	G3/8	500mm	Nitrile
EXT075G38SS SS 316L	G3/8	750mm	Nitrile
EXT100G38SS SS316L	G3/8	1000mm	Nitrile
EXT025M16SS SS316L	M16x2	250mm	Nitrile
EXT050M16SS SS 316L	M16x2	500mm	Nitrile

Custom versions can be made for particular applications. Please contact Sensata with your requirements.

Polypropylene versions

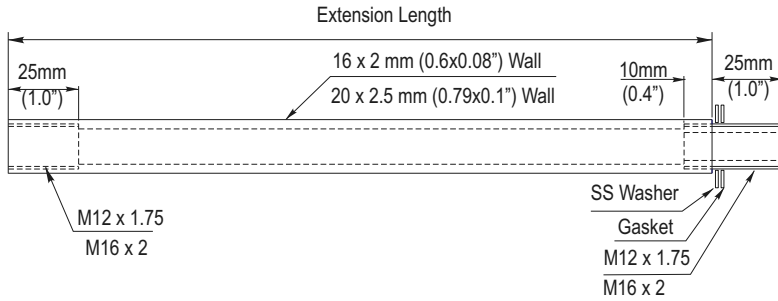

Stainless steel SS 316L versions

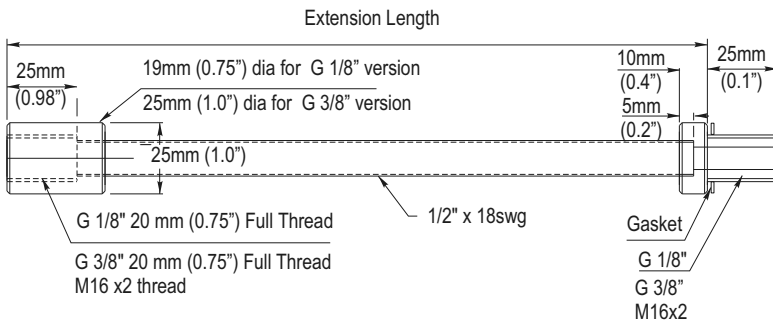

Distributor



amstechnologies

where technologies meet solutions

info@amstechnologies.com
www.amstechnologies-webshop.com

Contact us 

Sensata Technologies, Inc. ("Sensata") data sheets are solely intended to assist designers ("Buyers") who are developing systems that incorporate Sensata products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, evaluation and judgment in designing Buyer's systems and products. Sensata data sheets have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular data sheet. Sensata may make corrections, enhancements, improvements and other changes to its data sheets or components without notice.

Buyers are authorized to use Sensata data sheets with the Sensata component(s) identified in each particular data sheet. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATA SHEETS ARE PROVIDED "AS IS". SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATA SHEETS OR USE OF THE DATA SHEETS, EXPRESS, IMPLIED OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATA SHEETS OR USE THEREOF.

All products are sold subject to Sensata's terms and conditions of sale supplied at www.sensata.com SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS' PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS-RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

Mailing Address: Sensata Technologies, Inc., 529 Pleasant Street, Attleboro, MA 02703, USA.